


# EXTENDED-TAB (ET) CONNECTION

## NEW MILL-TYPE E.T. CONNECTION #3

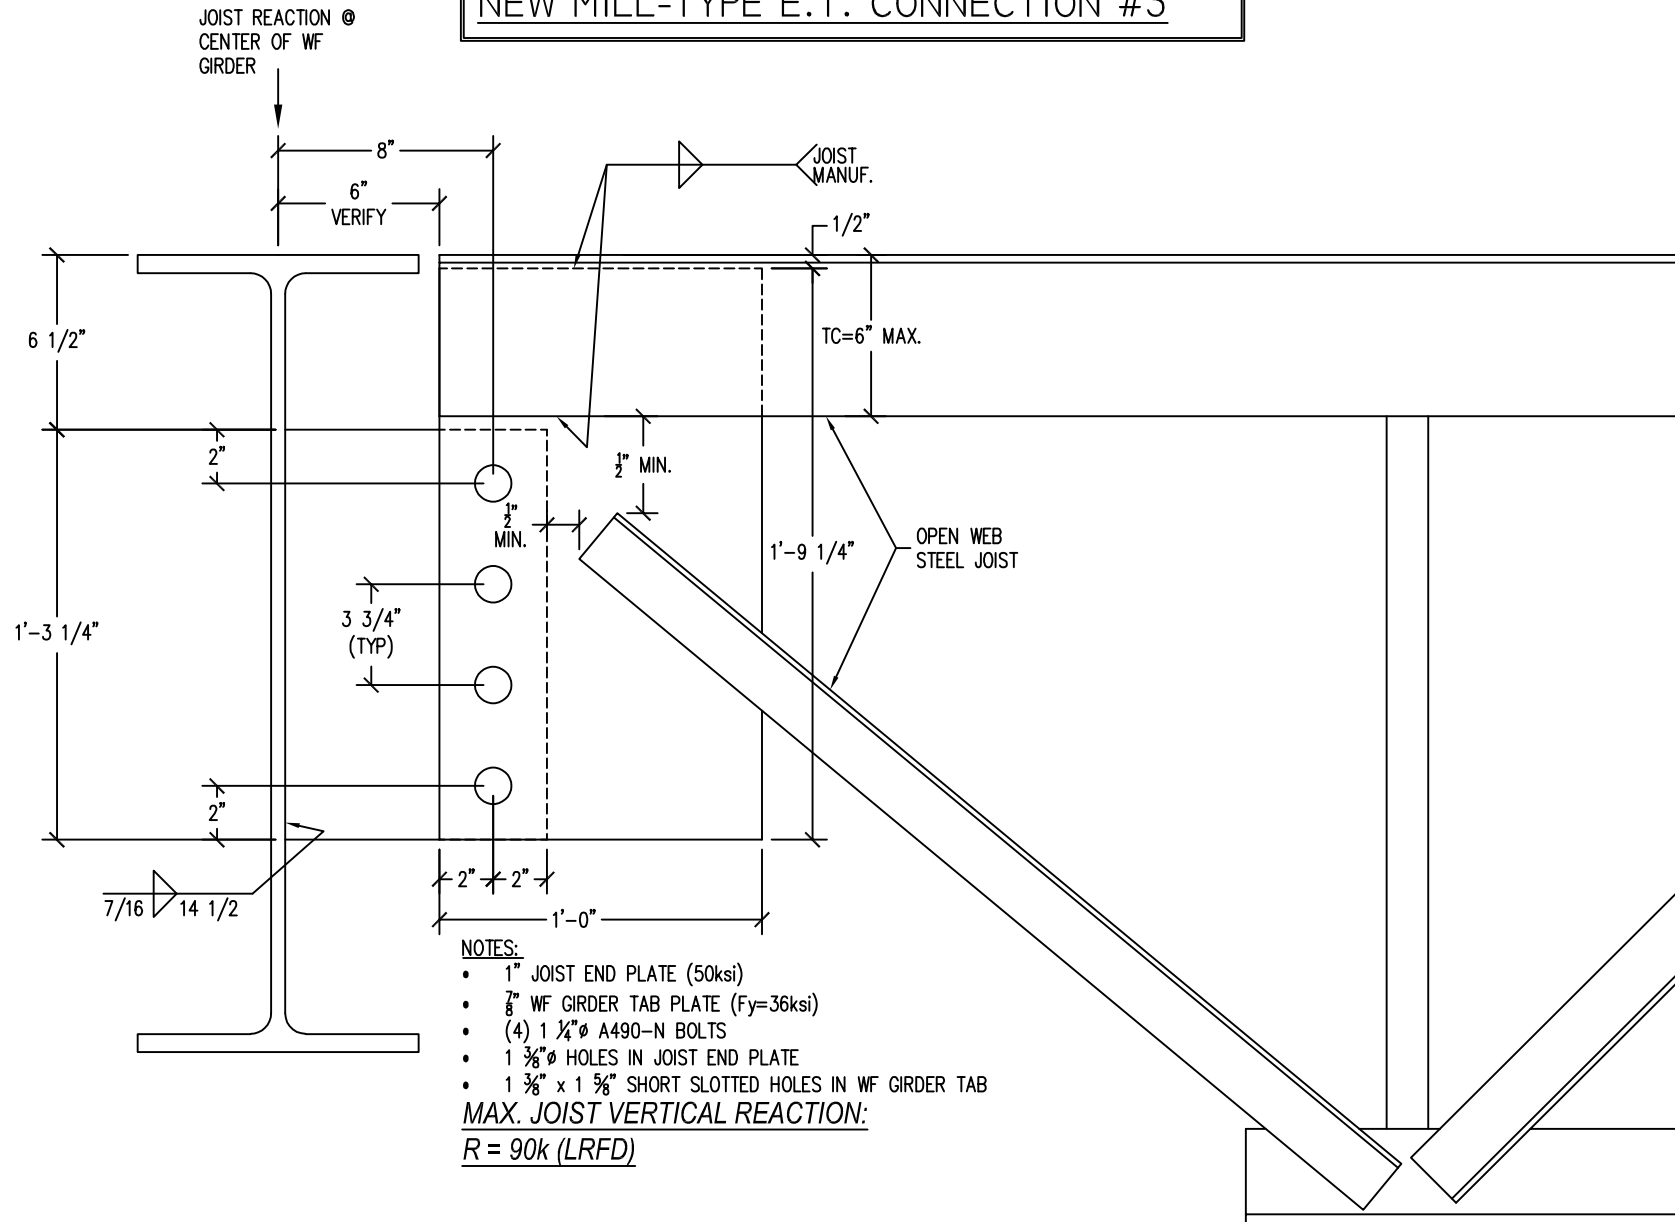

**NEW MILLENNIUM**

A Steel Dynamics Company

WWW.NEWMILL.COM

Date: 3/18/2025



# NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS E.T. #3 Joist End Plate	DATE:	3/18/2025

### AISC 16TH - p. 10-49 (Extended Configuration)

Holes must satisfy AISC J3.3

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate

Joist Plate, $F_u = 65$ ksi	TC Hold Back Distance (H) = 6 in	Joist Plate $w = 12$ in
Joist Tab Plate, $F_y = 50$ ksi	TC Angle Size = 3.5 in	Joist Plate $d = 21.25$ in
Joist Plate, $d$ or $w = 12$ in	Joist Plate Hold-Down from TC = 0.5 in	
Joist Plate Thickness, $t = 1$ in		
Joist Plate Edge Distances, $d_e = 2$ in		
$e = 8$ in		$L_{11} = 5.625$
Vertical Shear, $V_u = 90$ k (LRFD)		$L_{12} = 1.875$
Vertical Ecc. Moment, $M_u = 720$ k*in (LRFD)		$L_{13} = 0$
Bolt Diameter, $D_b = 1.25$ in		$L_{14} = 0$
Bolt Shear Capacity $\phi R_n = 62.7$ k (A490-N)		$L_{15} = 0$
# of Bolts, $N_b = 4$ (Spreadsheet design limitation, max. 10 bolts)		
Spacing of Bolt Group, $S = 3.75$ in		
Vert. C.G. of Bolt Group = 5.625 in		
$F_{nv}/0.9 = 75.56$ ksi (Table J3.2, A490-N Bolts)		
Short Slotted Hole, $L_h = 1.63$ in (conservative design, allows for slotted holes in joist plate)		
Joist Top Chord Axial Force, $V_{TC} = 135$ k (LRFD)...Assumes 1.5:1 End Web Slope		

Gross Plate Area, $A_g = 12$ in <sup>2</sup>
Effective Plate Area, $A_e = 10.63$ in <sup>2</sup>
$Z = 36$ in <sup>3</sup> (1/4t*w <sup>2</sup> )
$S = 24$ in <sup>3</sup> (1/6t*w <sup>2</sup> )

#### Bolt Shear - Elastic Vector Method: (AISC p. 7-7, 7-8)

Bolt Group $I_p = 70.31$ in <sup>4</sup> /in <sup>2</sup>
$r_{py} = 22.50$ k ( $V_u/\#$ Bolts)
$r_{mx} = 57.60$ k ( $M_u * L_{11}/I_p$ )
$H_m = 57.60$ k ( $r_{mx} * N_c$ ) $N_c = 1$ column of bolts
$R_u = 61.84$ k ( $(r_{py}^2 + r_{mx}^2)^{1/2}$ )
$R_u / \phi R_n = 0.99 < 1.0$ OK


#### Bolt Bearing & Tearout: (AISC J3.11)

Bearing $R_{nb} = 195.00$ k/bolt ( $2.4 * D_b * t * F_u$ ) AISC J3-6a
$L_{ch} = 1.19$ in ( $d_e - L_h/2$ )
Horizontal Tearout $R_{nt} = 92.63$ k/bolt ( $1.2 * L_{ch} * t * F_u$ ) AISC J3-6c
$R_u = 61.84$ k (worst case bolt shear)
$r_{mx} = 57.60$ k (worst case horiz. bolt shear)
$\phi = 0.75$ (AISC J3.11)
Bearing $R_u / \phi R_{nb} = 0.42 < 1.0$ OK
Tearout $r_{mx} / \phi R_{nt} = 0.83 < 1.0$ OK

Stress Ratio Results:	
Bolt Shear (V&M):	0.99
Bolt Bearing & Tearout:	0.83
Shear Plate Rupture:	0.35
Shear Plate Block Shear:	0.39
Shear Plate Flexural Rupture:	0.44
Shear Plate Yielding & Flexural:	0.26

Min. Joist TC to Plate Weld:

3 /16th x 11.5 " Fillet Weld

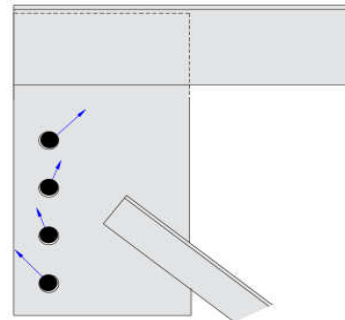

NOTE: FOR VISUAL FORCE SCHEMATIC ONLY



# NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS E.T. #3 Joist End Plate	DATE:	3/18/2025

### Shear Plate Rupture: (AISC J4.2)

Crushed Hole Width,  $W' = 1.4375$  in (plate hole + 1/16" Crushed width)  
 Net Plastic Modulus,  $Z_{net} = 28.41$  in<sup>3</sup> ( $Z - W'*t*d_{hole}$ )  $d_{hole} = 5.28125$   
 $\phi V_n = 310.78$  k ( $\phi = 0.75, \phi*0.60*F_u*A_e$ ) AISC J4-4  
 $\phi M_n = 1384.90$  k\*in ( $\phi = 0.75, \phi*F_u*Z$ )  
 $R_u / \phi R_n = 0.35 < 1.0$  OK ( $V_u/\phi V_n$ )<sup>2</sup> + ( $M_u/\phi M_n$ )<sup>2</sup>

### Shear Plate Block Shear: (AISC J4.3)

Vertical Direction

Gross Area in Shear,  $A_{gv} = 13.25$  in<sup>2</sup> ( $t*(d_e + (Nb-1)*S)$ )  
 Net Area in Shear,  $A_{nv} = 7.50$  in<sup>2</sup> ( $A_{gv} - (Nb*W')$ )  
 Net Area in Tension,  $A_{nt} = 1.19$  in<sup>2</sup> ( $t*(d_e - L_h/2)$ )  
 Gross Area,  $\phi R_n = 356.02$  k ( $0.75*(0.6*F_y*A_{gv} + U_{bs}*F_u*A_{nt})$ )  $U_{bs} = 1.0$  for single bolt line  
 Net Area,  $\phi R_n = 277.27$  k ( $0.75*(0.6*F_u*A_{nv} + U_{bs}*F_u*A_{nt})$ ) AISC J4-5

Note: Use of  $L_h$  for determination of Net Plate Area, allows for the slots to be in either the joist end plate or the beam tab.

Horizontal Direction

Gross Area in Shear,  $A_{gv} = 4.00$  in<sup>2</sup> ( $2*t*d_e$ )  
 Net Area in Shear,  $A_{nv} = 2.38$  in<sup>2</sup> ( $2*t*(d_e - L_h/2)$ )  
 Net Area in Tension,  $A_{nt} = 6.94$  in<sup>2</sup> ( $t*((Nb-1)*S - (Nb-1)*W')$ )  
 Gross Area,  $\phi R_n = 428.20$  k ( $0.75*(0.6*F_y*A_{gv} + U_{bs}*F_u*A_{nt})$ )  $U_{bs} = 1.0$  for single bolt line  
 Net Area,  $\phi R_n = 407.67$  k ( $0.75*(0.6*F_u*A_{nv} + U_{bs}*F_u*A_{nt})$ ) AISC J4-5

Note: Use of  $L_h$  for determination of Net Plate Area, allows for the slots to be in either the joist end plate or the beam tab.

$\phi R_n = 277.27$  k Controls  
 $R_u / \phi R_n = 0.39 < 1.0$  OK ( $V_u^2 + H_m^2$ )<sup>1/2</sup> /  $\phi R_n$

### Shear Plate Flexural Rupture: (AISC F11)


Yielding  $M_c = 1620.0$  k\*in ( $\phi = 0.9, \phi*(F_y*Z < 1.5F_y*S)$ ) AISC F11-1  
 Lateral-Torsional Buckling Check: 96.0  $L_b*d/t^2, L_b = e$  Check for Lateral Torsional Buckling per AISC F11-3  
 Lateral-Torsional Buckling,  $M_c = 1620$  k\*in AISC F11-3  
 $R_u / \phi R_n = 0.44 < 1.0$  OK ( $M_u/M_c$ )

### Shear Plate Yielding & Flexural Strength: (AISC 10-8)


$V_c = 360$  k ( $\phi = 1.0, \phi*0.6*F_y*Ag$ ) AISC J4-3  
 Yielding  $M_c = 1620$  k\*in ( $\phi = 0.9, \phi*(F_y*Z < 1.5F_y*S)$ ) AISC F11-1  
 Lateral-Torsional Buckling Check: 96.0  $L_b*d/t^2, L_b = e$  Check for Lateral Torsional Buckling per AISC F11-3  
 Lateral-Torsional Buckling,  $M_c = 1620$  k\*in AISC F11-3  
 $R_u / \phi R_n = 0.26 < 1.0$  OK ( $V_u/V_c$ )<sup>2</sup> + ( $M_u/M_c$ )<sup>2</sup> AISC 10-8

### Joist Plate Weld (Angle = 0 deg. & $C_1 = 1.00$ E70 Electrode):

Length of Plate Weld  $L_w = 11.5$  in ( $w-0.5''$ )  
 $a_y = 0.1$  AISC Table 8-4  $a_y = (\text{Weld Centroid} - \text{TC Centroid}) / L_w$   
 $k_y = 0.3$  AISC Table 8-4  $k_y = \text{Weld Spacing} / L_w$   
 $C_y = 3.71$  (y-axis weld eccentricity, AISC Table 8-4)  
 $D_{min} = 3$  /16ths of an inch Fillet Weld Size (min)



NOTE: SCHEMATIC ONLY. HOLES OR PLATE MAY VARY





# NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS Beam Tab E.T. #3	DATE:	3/18/2025

### AISC 16TH - p. 10-49 (Extended Configuration)

Holes must satisfy AISC J3.3

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate

Beam Tab Plate, $F_u$ =	58	ksi	
Beam Tab Plate, $F_y$ =	36	ksi	
Beam Tab Plate Depth, $d$ =	15.25	in	
Beam Tab Thickness, $t$ =	0.875	in	
Beam Tab Edge Distances, $d_e$ =	2	in	$L_{11} = 5.625$
$e$ =	8	in	$L_{12} = 1.875$
Vertical Shear, $V_u$ =	90	k (LRFD)	$L_{13} = 0$
Vertical Ecc. Moment, $M_u$ =	720	k*in (LRFD)	$L_{14} = 0$
Bolt Diameter, $D_b$ =	1.25	in	$L_{15} = 0$
Bolt Shear Capacity $\phi R_n$ =	62.7	k	
# of Bolts, $N_b$ =	4	(Spreadsheet design limitation, max. 10 bolts)	
Spacing of Bolt Group, $S$ =	3.75	in	
C.G. of Bolt Group =	5.625	in	
$F_{nv}/0.9$ =	75.56	ksi (Table J3.2, A490-N Bolts)	
Short Slotted Hole, $L_h$ =	1.63	in	

$$A_b = 1.23 \text{ in}^2 \text{ (Bolt Area)}$$

$$C' = 14.07 \text{ AISC Eq. 7-17}$$

$$M_{max} = 1304.62 \text{ k*in (} F_{nv}/0.9 * A_b * C', \text{ Eq. 10-7)}$$

$$\text{Max. Beam Tab Thickness, } t_{max} = 0.93 \text{ in (} 6 * M_{max} / (F_y * d^2) \text{ AISC Eq. 10-6)}$$

$$\text{Gross Plate Area, } A_g = 13.3438 \text{ in}^2$$

$$\text{Effective Plate Area, } A_e = 8.53 \text{ in}^2$$

$$Z = 50.873 \text{ in}^3 \text{ (} 1/4t * d^2 \text{)}$$

$$S_{net} = 33.92 \text{ in}^3 \text{ (} 1/6t * d^2 \text{)}$$

#### Bolt Shear - Elastic Vector Method: (AISC p. 7-7, 7-8)

$$\text{Bolt Group } I_p = 70.31 \text{ in}^4/\text{in}^2$$

$$r_{py} = 22.50 \text{ k (} V_u / \# \text{ Bolts)}$$

$$r_{mx} = 57.60 \text{ k (} M_u * L_{11} / I_p \text{)}$$

$$H_m = 57.60 \text{ k (} r_{mx} * N_c \text{) } N_c = 1 \text{ column of bolts}$$

$$R_u = 61.84 \text{ k (} (r_{py}^2 + r_{mx}^2)^{1/2} \text{)}$$

$$R_u / \phi R_n = 0.99 < 1.0 \text{ OK}$$

#### Bolt Bearing & Tearout: (AISC J3.11)

$$\text{Bearing } R_{nb} = 152.25 \text{ k/bolt (} 2.4 * D_b * t * F_u \text{) AISC J3-6a}$$

$$L_{ch} = 1.19 \text{ in (} d_e - L_h / 2 \text{)}$$

$$\text{Horizontal Tearout } R_{nt} = 72.32 \text{ k/bolt (} 1.2 * L_{ch} * t * F_u \text{) AISC J3-6c}$$

$$R_u = 61.84 \text{ k (worst case bolt shear)}$$

$$r_{mx} = 57.60 \text{ k (worst case horiz. bolt shear)}$$

$$\phi = 0.75 \text{ (AISC J3.11)}$$

$$\text{Bearing } R_u / \phi R_{nb} = 0.54 < 1.0 \text{ OK}$$

$$\text{Tearout } r_{mx} / \phi R_{nt} = 1.06 < 1.5/1.2 \text{ O.K. Deformation at hole may occur}$$

#### Stress Ratio Results:

$$\text{Bolt Shear (V\&M): } 0.99$$

$$\text{Bolt Bearing \& Tearout: } 1.06 \text{ O.K.}$$

$$\text{Shear Tab Rupture: } 0.43$$


$$\text{Shear Tab Block Shear: } 0.49$$

$$\text{Shear Tab Flexural Rupture: } 0.44$$

$$\text{Shear Tab Yielding \& Flexural: } 0.29$$

$$7/16" \text{ Tab Weld: } 0.30$$

Plate Stability Acceptable

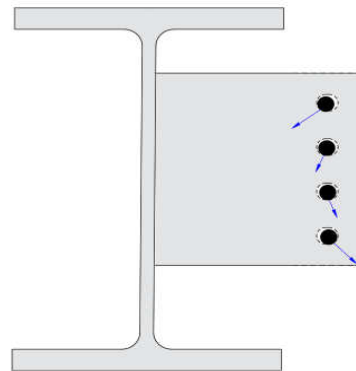

NOTE: FOR VISUAL FORCE SCHEMATIC ONLY



# NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:	DATE:	3/18/2025
LOCATION:	NMBS Beam Tab E.T. #3		

### Shear Tab Rupture: (AISC J4.2)

Crushed Hole Width,  $W' = 1.4375$  in (plate hole + 1/16" Crushed width)  
 Net Plastic Modulus,  $Z_{net} = 32.01$  in<sup>3</sup> (Summation of  $A*d$  of net plate section)  
 $\phi V_n = 222.67$  k ( $\phi = 0.75, \phi * .60 * F_u * A_e$ ) AISC J4-4  
 $\phi M_n = 1392.25$  k\*in ( $\phi = 0.75, \phi * F_u * Z$ )  
 $R_u / \phi R_n = 0.43 < 1.0$  OK ( $(V_u / \phi V_n)^2 + (M_u / \phi M_n)^2$ )

### Shear Tab Block Shear: (AISC J4.3)


Vertical Direction

Gross Area in Shear,  $A_{gv} = 11.59$  in<sup>2</sup> ( $t * (d_e + (N_b - 1) * S)$ )  
 Net Area in Shear,  $A_{nv} = 6.56$  in<sup>2</sup> ( $A_{gv} - (N_b * W')$ ) \*  $t$   
 Net Area in Tension,  $A_{nt} = 1.04$  in<sup>2</sup> ( $t * (d_e - L_h / 2)$ )  
 Gross Area,  $\phi R_n = 233.02$  k ( $0.75 * (0.6 * F_y * A_{gv} + U_{bs} * F_u * A_{nt})$ )  $U_{bs} = 1.0$  for single bolt line  
 Net Area,  $\phi R_n = 216.48$  k ( $0.75 * (0.6 * F_u * A_{nv} + U_{bs} * F_u * A_{nt})$ ) AISC J4-5


Horizontal Direction

Gross Area in Shear,  $A_{gv} = 3.50$  in<sup>2</sup> ( $2 * t * d_e$ )  
 Net Area in Shear,  $A_{nv} = 2.08$  in<sup>2</sup> ( $2 * t * (d_e - L_h / 2)$ )  
 Net Area in Tension,  $A_{nt} = 6.07$  in<sup>2</sup> ( $t * ((N_b - 1) * S - (N_b - 1) * W)$ )  
 Gross Area,  $\phi R_n = 320.76$  k ( $0.75 * (0.6 * F_y * A_{gv} + U_{bs} * F_u * A_{nt})$ )  $U_{bs} = 1.0$  for single bolt line  
 Net Area,  $\phi R_n = 318.30$  k ( $0.75 * (0.6 * F_u * A_{nv} + U_{bs} * F_u * A_{nt})$ ) AISC J4-5

$\phi R_n = 216.48$  k Controls  
 $R_u / \phi R_n = 0.49 < 1.0$  OK ( $(V_u^2 + H_m^2)^{1/2} / \phi R_n$ )



NOTE: SCHEMATIC ONLY,  
HOLES MAY VARY



### Shear Tab Flexural Rupture: (AISC F11)

Yielding  $M_c = 1648.3$  k\*in ( $\phi = 0.9, \phi * (F_y * Z < 1.5 F_y * S)$ ) AISC F11-1  
 Lateral-Torsional Buckling Check: 159.3  $L_b * d / t^2$ ,  $L_b = e$  Check for Lateral Torsional Buckling per AISC F11-3  
 Lateral-Torsional Buckling,  $M_c = 1648.3$  k\*in AISC F11-3  
 $R_u / \phi R_n = 0.44 < 1.0$  OK ( $M_u / M_c$ )

### Shear Tab Yielding & Flexural Strength: (AISC 10-8)

$V_c = 288.2$  k ( $\phi = 1.0, \phi * 0.6 * F_y * A_g$ ) AISC J4-3  
 Yielding  $M_c = 1648.3$  k\*in ( $\phi = 0.9, \phi * (F_y * Z < 1.5 F_y * S)$ ) AISC F11-1  
 Lateral-Torsional Buckling Check: 159.3  $L_b * d / t^2$ ,  $L_b = e$  Check for Lateral Torsional Buckling per AISC F11-3  
 Lateral-Torsional Buckling,  $M_c = 1648.3$  k\*in AISC F11-3  
 $R_u / \phi R_n = 0.29 < 1.0$  OK ( $(V_u / V_c)^2 + (M_u / M_c)^2$ ) AISC 10-8

### Shear Tab Weld:

Min. Weld Thickness  $t_{wmin} = 0.39$  in.  $t_{wmin} = (t * F_y * 3^{1/2}) / (2 * F_{EXX})$ ,  $F_{EXX} = 70$ ksi Electrode, AISC Engineering Journal, Vol. 46, 2009  
 Weld Provided  $t_w = 0.4375$  in  
 Min. Plate Thickness = 0.75 in (AISC Eq. 9-7,  $6.19 * D / F_u$ ) **GOOD**  
 $\phi R_w = 297.17$  k ( $\phi * 0.6 * F_{EXX} * 0.707 * t_w * d^2$ )

$R_u / \phi R_n = 0.30 < 1.0$  OK

### Shear Tab Stability: (Thornton and Fortney, 2011)

#### Lateral Torsional Buckling Check:

$\phi R_n = 677$  k **Acceptable**

$$R_{req'd} \leq \phi R_n \text{ (LRFD)}$$

$$R_n = 1500 \pi \frac{l^3}{a^2}$$

$l$  = beam tab plate length (depth)  
 $t$  = tp = beam tab plate thickness  
 $a$  = Eccentricity 'e'

#### Lap Splice Eccentricity Check:

$\phi M_{t,u} = 86.7$  k\*in  
 $M_{t,u} = 84.4$  k\*in ( $R * (t_p + t_t) / 2$ )

$$M_{t,u} \leq \left[ \phi_v (0.6 F_{yp}) - \frac{R_u}{t_p} \right] \frac{t_p^2}{2} \quad \phi_v = 1.0$$

(LRFD)

**Acceptable**