


EXTENDED-TAB (ET) CONNECTION

NEW MILL-TYPE E.T. CONNECTION #5A

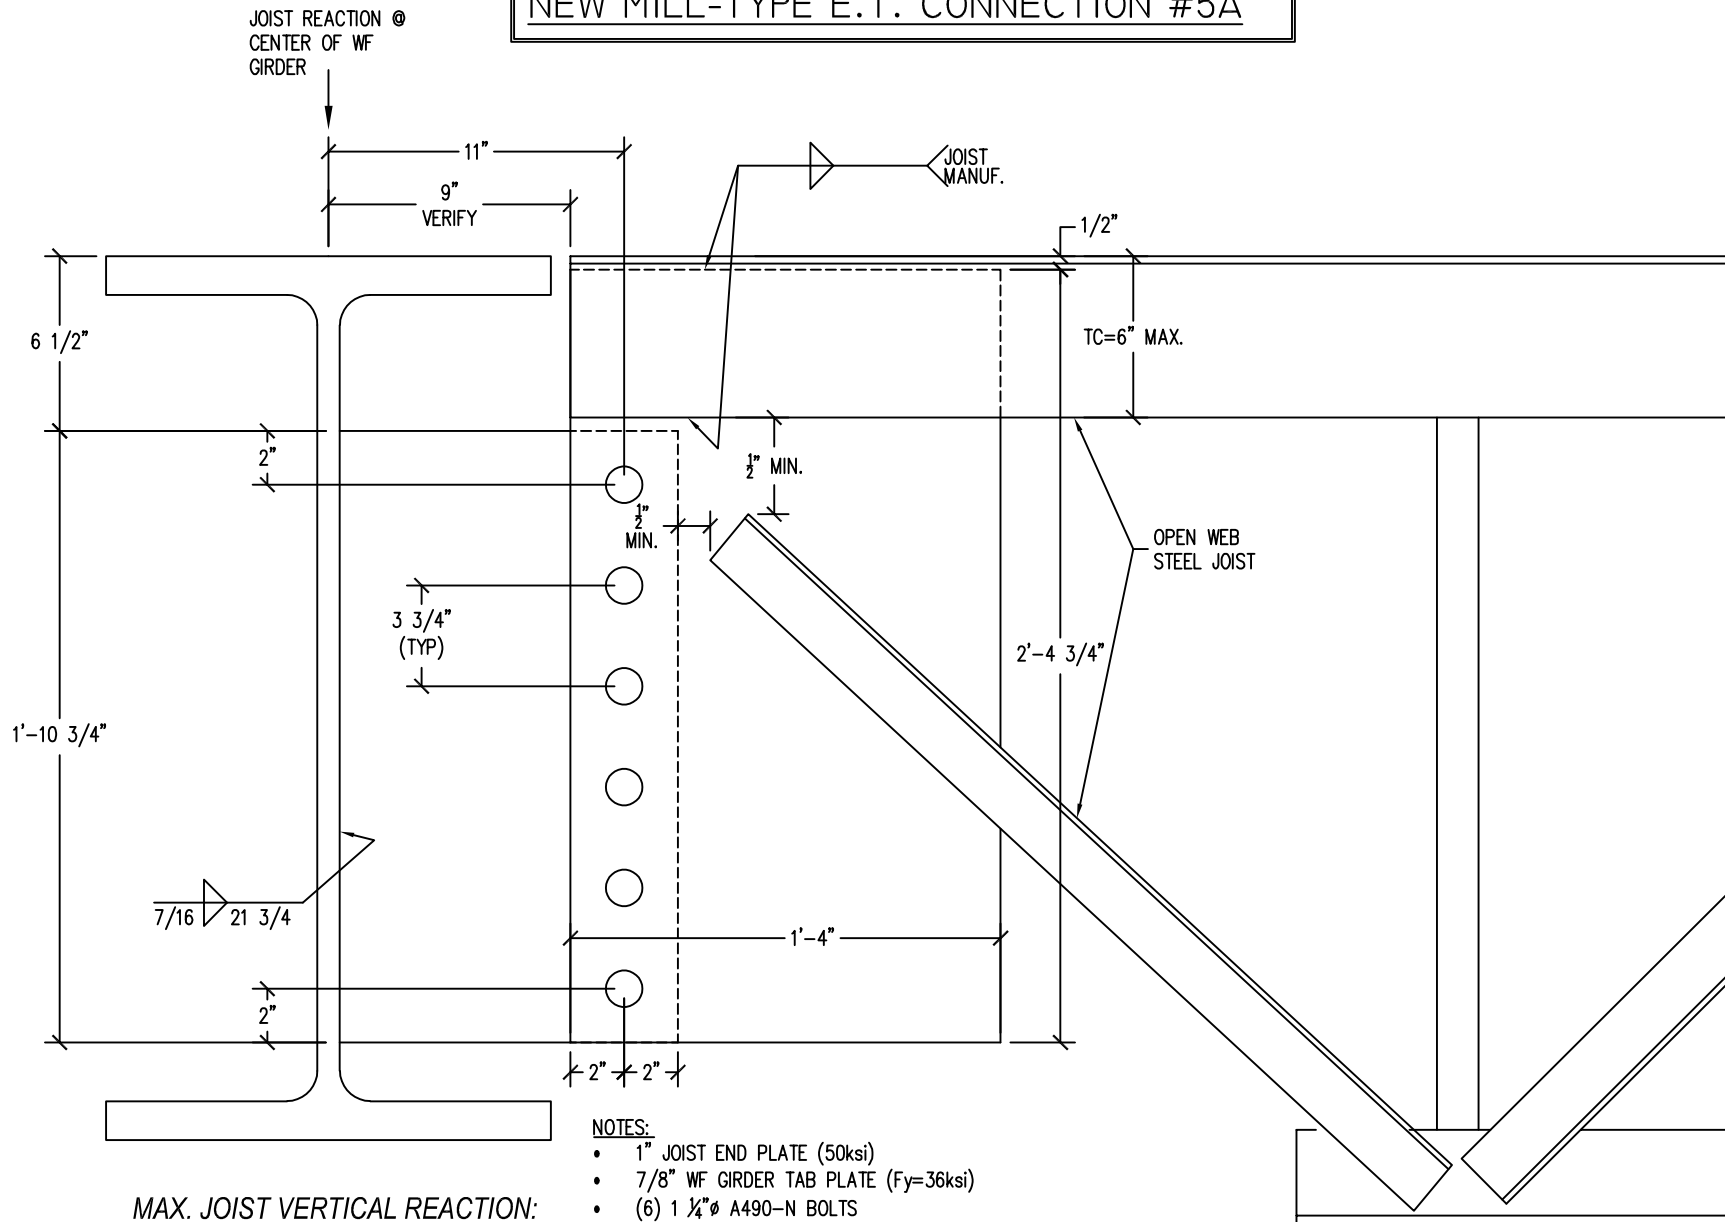

MAX. JOIST VERTICAL REACTION:
 $R = 136k$ (LRFD)

NOTES:

- 1" JOIST END PLATE (50ksi)
- 7/8" WF GIRDER TAB PLATE ($F_y=36$ ksi)
- (6) 1 1/4" ϕ A490-N BOLTS
- 1 3/8" ϕ HOLES IN JOIST END PLATE
- 1 3/8" x 1 5/8" SHORT SLOTTED HOLES IN WF GIRDER TAB



NEW MILLENNIUM

A Steel Dynamics Company

WWW.NEWMILL.COM

Date: 3/18/2025



NEW MILLENNIUM

A Steel Dynamics Company

| | | | |
|-----------|-------------------------------|-------|-----------|
| JOB NAME: | JOB #: | | |
| LOCATION: | NMBS E.T. #5A Joist End Plate | DATE: | 3/18/2025 |

AISC 16TH - p. 10-49 (Extended Configuration)

Holes must satisfy AISC J3.3

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate

| | | | | | | | | |
|---|-------|---|---------------------------------|-----|----|-----------------|-------|----|
| Joist Plate, $F_u =$ | 65 | ksi | TC Hold Back Distance (H) = | 9 | in | Joist Plate w = | 16 | in |
| Joist Tab Plate, $F_y =$ | 50 | ksi | TC Angle Size = | 3.5 | in | Joist Plate d = | 28.75 | in |
| Joist Plate, d or w = | 16 | in | Joist Plate Hold-Down from TC = | 0.5 | in | | | |
| Joist Plate Thickness, t = | 1 | in | | | | | | |
| Joist Plate Edge Distances, de = | 2 | in | | | | | | |
| e = | 11 | in | | | | $L_{11} =$ | 9.375 | |
| Vertical Shear, $V_u =$ | 136 | k (LRFD) | | | | $L_{12} =$ | 5.625 | |
| Vertical Ecc. Moment, $M_u =$ | 1496 | k*in (LRFD) | | | | $L_{13} =$ | 1.875 | |
| Bolt Diameter, $D_b =$ | 1.25 | in | | | | $L_{14} =$ | 0 | |
| Bolt Shear Capacity $\phi R_n =$ | 62.7 | k (A490-N) | | | | $L_{15} =$ | 0 | |
| # of Bolts, $N_b =$ | 6 | (Spreadsheet design limitation, max. 10 bolts) | | | | | | |
| Spacing of Bolt Group, S = | 3.75 | in | | | | | | |
| Vert. C.G. of Bolt Group = | 9.375 | in | | | | | | |
| $F_{nv}/0.9 =$ | 75.56 | ksi (Table J3.2, A490-N Bolts) | | | | | | |
| Short Slotted Hole, Lh = | 1.63 | in (conservative design, allows for slotted holes in joist plate) | | | | | | |
| Joist Top Chord Axial Force, $V_{TC} =$ | 204 | k (LRFD)...Assumes 1.5:1 End Web Slope | | | | | | |

| | | |
|-------------------------------|---------|--|
| Gross Plate Area, $A_g =$ | 16 | in ² |
| Effective Plate Area, $A_e =$ | 14.63 | in ² |
| Z = | 64 | in ³ (1/4t*w ²) |
| S = | 42.6667 | in ³ (1/6t*w ²) |

Bolt Shear - Elastic Vector Method: (AISC p. 7-7, 7-8)

| | | |
|--------------------|--------|--|
| Bolt Group $I_p =$ | 246.09 | in ⁴ /in ² |
| $r_{py} =$ | 22.67 | k (Vu/# Bolts) |
| $r_{mx} =$ | 56.99 | k ($M_u * L_{11} / I_p$) |
| Hm = | 56.99 | k ($r_{mx} * N_c$) $N_c = 1$ column of bolts |
| $R_u =$ | 61.33 | k ($r_{py}^2 + r_{mx}^2$) ^{1/2} |
| $R_u / \phi R_n =$ | 0.98 | < 1.0 OK |


Bolt Bearing & Tearout: (AISC J3.11)

| | | |
|----------------------------------|--------|--|
| Bearing $R_{nb} =$ | 195.00 | k/bolt ($2.4 * D_b * t * F_u$) AISC J3-6a |
| $L_{ch} =$ | 1.19 | in ($d_e - L_h / 2$) |
| Horizontal Tearout $R_{nt} =$ | 92.63 | k/bolt ($1.2 * L_{ch} * t * F_u$) AISC J3-6c |
| $R_u =$ | 61.33 | k (worst case bolt shear) |
| $r_{mx} =$ | 56.99 | k (worst case horiz. bolt shear) |
| $\phi =$ | 0.75 | (AISC J3.11) |
| Bearing $R_u / \phi R_{nb} =$ | 0.42 | < 1.0 OK |
| Tearout $r_{mx} / \phi R_{nt} =$ | 0.82 | < 1.0 OK |

| Stress Ratio Results: | |
|----------------------------------|------|
| Bolt Shear (V&M): | 0.98 |
| Bolt Bearing & Tearout: | 0.82 |
| Shear Plate Rupture: | 0.43 |
| Shear Plate Block Shear: | 0.36 |
| Shear Plate Flexural Rupture: | 0.52 |
| Shear Plate Yielding & Flexural: | 0.35 |

Min. Joist TC to Plate Weld:

3 /16th x 15.5 " Fillet Weld



NOTE: FOR VISUAL FORCE SCHEMATIC ONLY



NEW MILLENNIUM

A Steel Dynamics Company

| | | | |
|-----------|-------------------------------|-------|-----------|
| JOB NAME: | JOB #: | | |
| LOCATION: | NMBS E.T. #5A Joist End Plate | DATE: | 3/18/2025 |

Shear Plate Rupture: (AISC J4.2)

Crushed Hole Width, $W' = 1.4375$ in (plate hole + 1/16" Crushed width)
 Net Plastic Modulus, $Z_{net} = 53.53$ in³ ($Z - W'*t*d_{hole}$) $d_{hole} = 7.28125$
 $\phi V_n = 427.78$ k ($\phi = 0.75, \phi*0.6*F_u*A_e$) AISC J4-4
 $\phi M_n = 2609.74$ k*in ($\phi = 0.75, \phi*F_u*Z$)
 $R_u / \phi R_n = 0.43 < 1.0$ OK ($V_u/\phi V_n$)² + ($M_u/\phi M_n$)²

Shear Plate Block Shear: (AISC J4.3)

Vertical Direction

Gross Area in Shear, $A_{gv} = 20.75$ in² ($t*(d_e + (Nb-1)*S)$)
 Net Area in Shear, $A_{nv} = 12.13$ in² ($A_{gv} - (Nb*W')$)
 Net Area in Tension, $A_{nt} = 1.19$ in² ($t*(d_e - L_h/2)$)
 Gross Area, $\phi R_n = 524.77$ k ($0.75*(0.6*F_y*A_{gv} + U_{bs}*F_u*A_{nt})$) $U_{bs} = 1.0$ for single bolt line
 Net Area, $\phi R_n = 412.55$ k ($0.75*(0.6*F_u*A_{nv} + U_{bs}*F_u*A_{nt})$) AISC J4-5

Note: Use of L_h for determination of Net Plate Area, allows for the slots to be in either the joist end plate or the beam tab.

Horizontal Direction

Gross Area in Shear, $A_{gv} = 4.00$ in² ($2*t*d_e$)
 Net Area in Shear, $A_{nv} = 2.38$ in² ($2*t*(d_e - L_h/2)$)
 Net Area in Tension, $A_{nt} = 11.56$ in² ($t*((Nb-1)*S - (Nb-1)*W')$)
 Gross Area, $\phi R_n = 653.67$ k ($0.75*(0.6*F_y*A_{gv} + U_{bs}*F_u*A_{nt})$) $U_{bs} = 1.0$ for single bolt line
 Net Area, $\phi R_n = 633.14$ k ($0.75*(0.6*F_u*A_{nv} + U_{bs}*F_u*A_{nt})$) AISC J4-5

Note: Use of L_h for determination of Net Plate Area, allows for the slots to be in either the joist end plate or the beam tab.

$\phi R_n = 412.55$ k Controls
 $R_u / \phi R_n = 0.36 < 1.0$ OK ($V_u^2 + H_m^2$)^{1/2} / ϕR_n

Shear Plate Flexural Rupture: (AISC F11)


Yielding $M_c = 2880.0$ k*in ($\phi = 0.9, \phi*(F_y*Z < 1.5F_y*S)$) AISC F11-1
 Lateral-Torsional Buckling Check: 176.0 $L_b*d/t^2, L_b = e$ Check for Lateral Torsional Buckling per AISC F11-3
 Lateral-Torsional Buckling, $M_c = 2880$ k*in AISC F11-3
 $R_u / \phi R_n = 0.52 < 1.0$ OK (M_u/M_c)

Shear Plate Yielding & Flexural Strength: (AISC 10-8)


$V_c = 480$ k ($\phi = 1.0, \phi*0.6*F_y*Ag$) AISC J4-3
 Yielding $M_c = 2880$ k*in ($\phi = 0.9, \phi*(F_y*Z < 1.5F_y*S)$) AISC F11-1
 Lateral-Torsional Buckling Check: 176.0 $L_b*d/t^2, L_b = e$ Check for Lateral Torsional Buckling per AISC F11-3
 Lateral-Torsional Buckling, $M_c = 2880$ k*in AISC F11-3
 $R_u / \phi R_n = 0.35 < 1.0$ OK (V_u/V_c)² + (M_u/M_c)² AISC 10-8

Joist Plate Weld (Angle = 0 deg. & $C_1 = 1.00$ E70 Electrode):

Length of Plate Weld $L_w = 15.5$ in ($w-0.5"$)
 $a_y = 0.1$ AISC Table 8-4 $a_y = (\text{Weld Centroid} - \text{TC Centroid}) / L_w$
 $k_y = 0.2$ AISC Table 8-4 $k_y = \text{Weld Spacing} / L_w$
 $C_y = 3.72$ (y-axis weld eccentricity, AISC Table 8-4)
 $D_{min} = 3$ /16ths of an inch Fillet Weld Size (min)



NOTE: SCHEMATIC ONLY. HOLES OR PLATE MAY VARY





NEW MILLENNIUM

A Steel Dynamics Company

| | | | |
|-----------|------------------------|-------|-----------|
| JOB NAME: | JOB #: | | |
| LOCATION: | NMBS Beam Tab E.T. #5A | DATE: | 3/18/2025 |

AISC 16TH - p. 10-49 (Extended Configuration)

Holes must satisfy AISC J3.3

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate

| | | | |
|----------------------------------|-------|--|------------------|
| Beam Tab Plate, F_u = | 58 | ksi | |
| Beam Tab Plate, F_y = | 36 | ksi | |
| Beam Tab Plate Depth, d = | 22.75 | in | |
| Beam Tab Thickness, t = | 0.875 | in | |
| Beam Tab Edge Distances, d_e = | 2 | in | $L_{11} = 9.375$ |
| e = | 11 | in | $L_{12} = 5.625$ |
| Vertical Shear, V_u = | 136 | k (LRFD) | $L_{13} = 1.875$ |
| Vertical Ecc. Moment, M_u = | 1496 | k*in (LRFD) | $L_{14} = 0$ |
| Bolt Diameter, D_b = | 1.25 | in | $L_{15} = 0$ |
| Bolt Shear Capacity ϕR_n = | 62.7 | k | |
| # of Bolts, N_b = | 6 | (Spreadsheet design limitation, max. 10 bolts) | |
| Spacing of Bolt Group, S = | 3.75 | in | |
| C.G. of Bolt Group = | 9.375 | in | |
| $F_{nv}/0.9$ = | 75.56 | ksi (Table J3.2, A490-N Bolts) | |
| Short Slotted Hole, L_h = | 1.63 | in | |

| | | |
|-------------|---------|--|
| A_b = | 1.23 | in ² (Bolt Area) |
| C' = | 31.37 | AISC Eq. 7-17 |
| M_{max} = | 2908.29 | k*in ($F_{nv}/0.9 * A_b * C'$, Eq. 10-7) |

Max. Beam Tab Thickness, t_{max} = 0.94 in ($6 * M_{max} / (F_y * d^2)$) AISC Eq. 10-6

| | | |
|-------------------------------|---------|----------------------------------|
| Gross Plate Area, A_g = | 19.9063 | in ² |
| Effective Plate Area, A_e = | 12.69 | in ² |
| Z = | 113.217 | in ³ ($1/4t * d^2$) |
| S_{net} = | 75.48 | in ³ ($1/6t * d^2$) |


Bolt Shear - Elastic Vector Method: (AISC p. 7-7, 7-8)

| | | |
|--------------------|--------|--|
| Bolt Group I_p = | 246.09 | in ⁴ /in ² |
| r_{py} = | 22.67 | k (Vu/# Bolts) |
| r_{mx} = | 56.99 | k ($M_u * L_{11} / I_p$) |
| H_m = | 56.99 | k ($r_{mx} * N_c$) $N_c = 1$ column of bolts |
| R_u = | 61.33 | k ($(r_{py}^2 + r_{mx}^2)^{1/2}$) |
| $R_u / \phi R_n$ = | 0.98 | < 1.0 OK |

Bolt Bearing & Tearout: (AISC J3.11)

| | | |
|----------------------------------|--------|--|
| Bearing R_{nb} = | 152.25 | k/bolt ($2.4 * D_b * t * F_u$) AISC J3-6a |
| L_{ch} = | 1.19 | in ($d_e - L_h / 2$) |
| Horizontal Tearout R_{nt} = | 72.32 | k/bolt ($1.2 * L_{ch} * t * F_u$) AISC J3-6c |
| R_u = | 61.33 | k (worst case bolt shear) |
| r_{mx} = | 56.99 | k (worst case horiz. bolt shear) |
| ϕ = | 0.75 | (AISC J3.11) |
| Bearing $R_u / \phi R_{nb}$ = | 0.54 | < 1.0 OK |
| Tearout $r_{mx} / \phi R_{nt}$ = | 1.05 | < 1.5/1.2 O.K. Deformation at hole may occur |

| Stress Ratio Results: | |
|--------------------------------|-----------|
| Bolt Shear (V&M): | 0.98 |
| Bolt Bearing & Tearout: | 1.05 O.K. |
| Shear Tab Rupture: | 0.39 |
| Shear Tab Block Shear: | 0.46 |
| Shear Tab Flexural Rupture: | 0.41 |
| Shear Tab Yielding & Flexural: | 0.27 |
| 7 /16" Tab Weld: | 0.31 |
| Plate Stability Acceptable | |

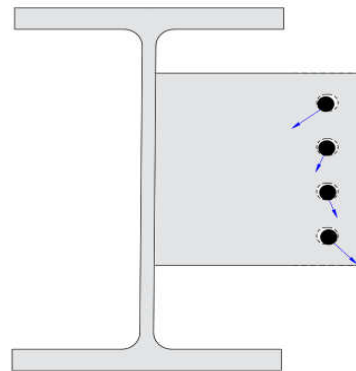

NOTE: FOR VISUAL FORCE SCHEMATIC ONLY



NEW MILLENNIUM

A Steel Dynamics Company

| | | | |
|-----------|------------------------|-------|-----------|
| JOB NAME: | JOB #: | | |
| LOCATION: | NMBS Beam Tab E.T. #5A | DATE: | 3/18/2025 |

Shear Tab Rupture: (AISC J4.2)

Crushed Hole Width, $W' = 1.4375$ in (plate hole + 1/16" Crushed width)
 Net Plastic Modulus, $Z_{net} = 73.80$ in³ (Summation of $A*d$ of net plate section)
 $\phi V_n = 331.14$ k ($\phi = 0.75, \phi * .60 * F_u * A_e$) AISC J4-4
 $\phi M_n = 3210.33$ k*in ($\phi = 0.75, \phi * F_u * Z$)
 $R_u / \phi R_n = 0.39 < 1.0$ OK ($(V_u / \phi V_n)^2 + (M_u / \phi M_n)^2$)

Shear Tab Block Shear: (AISC J4.3)


Vertical Direction

Gross Area in Shear, $A_{gv} = 18.16$ in² ($t * (d_e + (N_b - 1) * S)$)
 Net Area in Shear, $A_{nv} = 10.61$ in² ($A_{gv} - (N_b * W')$) * t
 Net Area in Tension, $A_{nt} = 1.04$ in² ($t * (d_e - L_h / 2)$)
 Gross Area, $\phi R_n = 339.33$ k ($0.75 * (0.6 * F_y * A_{gv} + U_{bs} * F_u * A_{nt})$) $U_{bs} = 1.0$ for single bolt line
 Net Area, $\phi R_n = 322.10$ k ($0.75 * (0.6 * F_u * A_{nv} + U_{bs} * F_u * A_{nt})$) AISC J4-5


Horizontal Direction

Gross Area in Shear, $A_{gv} = 3.50$ in² ($2 * t * d_e$)
 Net Area in Shear, $A_{nv} = 2.08$ in² ($2 * t * (d_e - L_h / 2)$)
 Net Area in Tension, $A_{nt} = 10.12$ in² ($t * ((N_b - 1) * S - (N_b - 1) * W)$)
 Gross Area, $\phi R_n = 496.80$ k ($0.75 * (0.6 * F_y * A_{gv} + U_{bs} * F_u * A_{nt})$) $U_{bs} = 1.0$ for single bolt line
 Net Area, $\phi R_n = 494.34$ k ($0.75 * (0.6 * F_u * A_{nv} + U_{bs} * F_u * A_{nt})$) AISC J4-5

$\phi R_n = 322.10$ k Controls
 $R_u / \phi R_n = 0.46 < 1.0$ OK ($(V_u^2 + H_m^2)^{1/2} / \phi R_n$)



NOTE: SCHEMATIC ONLY,
HOLES MAY VARY



Shear Tab Flexural Rupture: (AISC F11)

Yielding $M_c = 3668.2$ k*in ($\phi = 0.9, \phi * (F_y * Z < 1.5 F_y * S)$) AISC F11-1
 Lateral-Torsional Buckling Check: 326.9 Lb*d/t^2, $L_b = e$ Check for Lateral Torsional Buckling per AISC F11-3
 Lateral-Torsional Buckling, $M_c = 3668.2$ k*in AISC F11-3
 $R_u / \phi R_n = 0.41 < 1.0$ OK (M_u / M_c)

Shear Tab Yielding & Flexural Strength: (AISC 10-8)

$V_c = 430.0$ k ($\phi = 1.0, \phi * 0.6 * F_y * A_g$) AISC J4-3
 Yielding $M_c = 3668.2$ k*in ($\phi = 0.9, \phi * (F_y * Z < 1.5 F_y * S)$) AISC F11-1
 Lateral-Torsional Buckling Check: 326.9 Lb*d/t^2, $L_b = e$ Check for Lateral Torsional Buckling per AISC F11-3
 Lateral-Torsional Buckling, $M_c = 3668.2$ k*in AISC F11-3
 $R_u / \phi R_n = 0.27 < 1.0$ OK ($(V_u / V_c)^2 + (M_u / M_c)^2$) AISC 10-8

Shear Tab Weld:

Min. Weld Thickness $t_{wmin} = 0.39$ in. $t_{wmin} = (t * F_y * 3^{1/2}) / (2 * F_{EXX})$, $F_{EXX} = 70$ ksi Electrode, AISC Engineering Journal, Vol. 46, 2009
 Weld Provided $t_w = 0.4375$ in
 Min. Plate Thickness = 0.75 in (AISC Eq. 9-7, $6.19 * D / F_u$) **GOOD**
 $\phi R_w = 443.32$ k ($\phi * 0.6 * F_{EXX} * 0.707 * t_w * d^2$)

$R_u / \phi R_n = 0.31 < 1.0$ OK

Shear Tab Stability: (Thornton and Fortney, 2011)

Lateral Torsional Buckling Check:

$\phi R_n = 534$ k **Acceptable**

$$R_{req'd} \leq \phi R_n \text{ (LRFD)}$$

$$R_n = 1500 \pi \frac{l^3}{a^2}$$

l = beam tab plate length (depth)
 t = tp = beam tab plate thickness
 a = Eccentricity 'e'

Lap Splice Eccentricity Check:

$\phi M_{t,u} = 128.6$ k*in
 $M_{t,u} = 127.5$ k*in ($R * (t_p + t_t) / 2$)

$$M_{t,u} \leq \left[\phi_V (0.6 F_{yp}) - \frac{R_u}{h_p} \right] \frac{h_p^2}{2} \quad \phi_V = 1.0$$

(LRFD)

Acceptable