

NEW MILL-TYPE U.F. CONNECTION #1



- $\frac{3}{4}$ " OR 1" JOIST END PLATE (Fy=36ksi or 50ksi)
- $\frac{1}{2}$ " WF GIRDER TAB PLATE (Fy=36ksi)
- (3) 1"  $\emptyset$  A490-N BOLTS
- 1  $\frac{1}{8}$ "  $\emptyset$  HOLES IN JOIST END PLATE
- 1  $\frac{1}{8}$ " x 1  $\frac{5}{16}$ " SHORT SLOTTED HOLES IN WF GIRDER TAB

MAX. JOIST VERTICAL REACTION:  
 $R = 62k$  (LRFD)



# NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS U.F. #1 Joist End Plate	DATE:	3/18/2025

## AISC 16TH - p. 10-49 (Extended Configuration)

Holes must satisfy AISC J3.3

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate

Joist Plate, $F_u$ =	58	ksi	TC Hold Back Distance (H) =	6	in	Joist Plate $w$ =	12	in
Joist Tab Plate, $F_y$ =	36	ksi	TC Angle Size =	3.5	in	Joist Plate $d$ =	10	in
Joist Plate, $d$ or $w$ =	10	in	Joist Plate Hold-Down from TC =	0.75	in			
Joist Plate Thickness, $t$ =	0.75	in						
Joist Plate Edge Distances, $d_e$ =	2	in						
$e$ =	3.25	in						
Vertical Shear, $V_u$ =	62	k (LRFD)						
Vertical Ecc. Moment, $M_u$ =	201.5	k*in (LRFD)						
Bolt Diameter, $D_b$ =	1	in						
Bolt Shear Capacity $\phi R_n$ =	40	k (A490-N)						
# of Bolts, $N_b$ =	3	(Spreadsheet design limitation, max. 10 bolts)						
Spacing of Bolt Group, $S$ =	3	in						
Vert. C.G. of Bolt Group =	3	in						
$F_{nv}/0.9$ =	75.56	ksi (Table J3.2, A490-N Bolts)						
Short Slotted Hole, $L_h$ =	1.31	in (conservative design, allows for slotted holes in joist plate)						
Joist Top Chord Axial Force, $V_{TC}$ =	93	k (LRFD)...Assumes 1.5:1 End Web Slope						

Gross Plate Area, $A_g$ =	7.5	in <sup>2</sup>
Effective Plate Area, $A_e$ =	6.66	in <sup>2</sup>
$Z$ =	18.75	in <sup>3</sup> (1/4t*w <sup>2</sup> )
$S$ =	12.5	in <sup>3</sup> (1/6t*w <sup>2</sup> )

### Bolt Shear - Elastic Vector Method: (AISC p. 7-7, 7-8)

Bolt Group $I_p$ =	18.00	in <sup>4</sup> /in <sup>2</sup>
$r_{py}$ =	20.67	k (Vu/# Bolts)
$r_{mx}$ =	33.58	k ( $M_u * L_{i1}/I_p$ )
$H_m$ =	33.58	k ( $r_{mx} * N_c$ ) $N_c$ = 1 column of bolts
$R_u$ =	39.43	k ( $r_{py}^2 + r_{mx}^2$ ) <sup>1/2</sup>
$R_u / \phi R_n$ =	0.99	< 1.0 OK

### Bolt Bearing & Tearout: (AISC J3.11)

Bearing $R_{nb}$ =	104.40	k/bolt ( $2.4 * D_b * t * F_u$ ) AISC J3-6a
$L_{ch}$ =	1.34	in ( $d_e - L_h/2$ )
Horizontal Tearout $R_{nt}$ =	70.14	k/bolt ( $1.2 * L_{ch} * t * F_u$ ) AISC J3-6c


$R_u$ =	39.43	k (worst case bolt shear)
$r_{mx}$ =	33.58	k (worst case horiz. bolt shear)

$\phi$ =	0.75	(AISC J3.11)
Bearing $R_u / \phi R_{nb}$ =	0.50	< 1.0 OK
Tearout $r_{mx} / \phi R_{nt}$ =	0.64	< 1.0 OK

Stress Ratio Results:	
Bolt Shear (V&M):	0.99
Bolt Bearing & Tearout:	0.64
Shear Plate Rupture:	0.22
Shear Plate Block Shear:	0.54
Shear Plate Flexural Rupture:	0.33
Shear Plate Yielding & Flexural:	0.26

Min. Joist TC to Plate Weld:

3 /16th x 7 " Fillet Weld

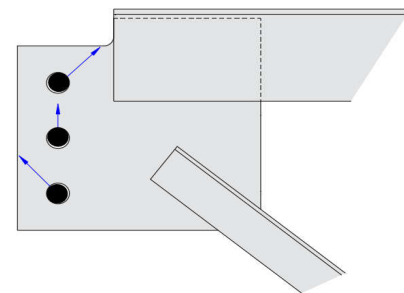

NOTE: FOR VISUAL FORCE SCHEMATIC ONLY



# NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS U.F. #1 Joist End Plate	DATE:	3/18/2025

## Shear Plate Rupture: (AISC J4.2)


Crushed Hole Width,  $W' = 1.1875$  in (plate hole +  $1/16"$  Crushed width)  
 Net Plastic Modulus,  $Z_{net} = 14.83$  in<sup>3</sup> ( $Z - W' * t * d_{hole}$ )  $d_{hole} = 4.40625$   
 $\phi V_n = 173.73$  k ( $\phi = 0.75, \phi * .60 * F_u * A_e$ ) AISC J4-4  
 $\phi M_n = 644.92$  k\*in ( $\phi = 0.75, \phi * F_u * Z$ )  
 $R_u / \phi R_n = 0.22 < 1.0$  OK ( $(V_u / \phi V_n)^2 + (M_u / \phi M_n)^2$ )

## Shear Plate Block Shear: (AISC J4.3)

Vertical Direction

Gross Area in Shear,  $A_{gv} = 6.00$  in<sup>2</sup> ( $t * (d_e + (N_b - 1) * S)$ )  
 Net Area in Shear,  $A_{nv} = 3.33$  in<sup>2</sup>  $A_{gv} - (N_b * W')$   
 Net Area in Tension,  $A_{nt} = 1.01$  in<sup>2</sup> ( $t * (d_e - L_h / 2)$ )  
 Gross Area,  $\phi R_n = 141.04$  k ( $0.75 * (0.6 * F_y * A_{gv} + U_{bs} * F_u * A_{nt})$ )  $U_{bs} = 1.0$  for single bolt line  
 Net Area,  $\phi R_n = 130.70$  k ( $0.75 * (0.6 * F_u * A_{nv} + U_{bs} * F_u * A_{nt})$ ) AISC J4-5

Note: Use of  $L_h$  for determination of Net Plate Area, allows for the slots to be in either the joist end plate or the beam tab.




Horizontal Direction

Gross Area in Shear,  $A_{gv} = 3.00$  in<sup>2</sup> ( $2 * t * d_e$ )  
 Net Area in Shear,  $A_{nv} = 2.02$  in<sup>2</sup> ( $2 * t * (d_e - L_h / 2)$ )  
 Net Area in Tension,  $A_{nt} = 2.72$  in<sup>2</sup> ( $t * ((N_b - 1) * S - (N_b - 1) * W)$ )  
 Gross Area,  $\phi R_n = 166.87$  k ( $0.75 * (0.6 * F_y * A_{gv} + U_{bs} * F_u * A_{nt})$ )  $U_{bs} = 1.0$  for single bolt line  
 Net Area,  $\phi R_n = 170.87$  k ( $0.75 * (0.6 * F_u * A_{nv} + U_{bs} * F_u * A_{nt})$ ) AISC J4-5

Note: Use of  $L_h$  for determination of Net Plate Area, allows for the slots to be in either the joist end plate or the beam tab.

NOTE: SCHEMATIC ONLY.  
HOLES OR PLATE MAY VARY



$\phi R_n = 130.70$  k Controls

$R_u / \phi R_n = 0.54 < 1.0$  OK ( $(V_u^2 + H_m^2)^{1/2} / \phi R_n$ )

## Shear Plate Flexural Rupture: (AISC F11)

Yielding  $M_c = 607.5$  k\*in ( $\phi = 0.9, \phi * (F_y * Z < 1.5 F_y * S)$ ) AISC F11-1  
 Lateral-Torsional Buckling Check:  $57.8$   $L_b * d / t^2$ ,  $L_b = e$   $< 0.08 * E / F_y$  Lateral Torsional Buckling does not apply  
 Lateral-Torsional Buckling,  $M_c = N/A$  k\*in  
 $R_u / \phi R_n = 0.33 < 1.0$  OK ( $M_u / M_c$ )

## Shear Plate Yielding & Flexural Strength: (AISC 10-8)

$V_c = 162$  k ( $\phi = 1.0, \phi * 0.6 * F_y * A_g$ ) AISC J4-3  
 Yielding  $M_c = 607.5$  k\*in ( $\phi = 0.9, \phi * (F_y * Z < 1.5 F_y * S)$ ) AISC F11-1  
 Lateral-Torsional Buckling Check:  $57.8$   $L_b * d / t^2$ ,  $L_b = e$   $< 0.08 * E / F_y$  Lateral Torsional Buckling does not apply  
 Lateral-Torsional Buckling,  $M_c = N/A$  k\*in  
 $R_u / \phi R_n = 0.26 < 1.0$  OK ( $(V_u / V_c)^2 + (M_u / M_c)^2$ ) AISC 10-8

## Joist Plate Weld (Angle = 0 deg. & $C_1 = 1.00$ E70 Electrode):

Length of Plate Weld  $L_w = 7$  in ( $w - (H - 1.25) - 0.25"$ )  
 $a_y = 0.2$  AISC Table 8-4  $a_y = (\text{Weld Centroid} - \text{TC Centroid}) / L_w$   
 $k_y = 0.4$  AISC Table 8-4  $k_y = \text{Weld Spacing} / L_w$   
 $C_y = 3.47$  (y-axis weld eccentricity, AISC Table 8-4)  
 $D_{min} = 3$  /16ths of an inch Fillet Weld Size (min)



# NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS Beam Tab U.F. #1, U.F. #1A	DATE:	3/18/2025

## AISC 16TH - p. 10-49 (Extended Configuration)

Holes must satisfy AISC J3.3

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate

Beam Tab Plate, $F_u$ =	58	ksi	
Beam Tab Plate, $F_y$ =	36	ksi	
Beam Tab Plate Depth, $d$ =	10	in	
Beam Tab Thickness, $t$ =	0.5	in	
Beam Tab Edge Distances, $d_e$ =	2	in	$L_{i1} = 3$
$e$ =	3.25	in	$L_{i2} = 0$
Vertical Shear, $V_u$ =	62	k (LRFD)	$L_{i3} = 0$
Vertical Ecc. Moment, $M_u$ =	201.5	k*in (LRFD)	$L_{i4} = 0$
Bolt Diameter, $D_b$ =	1	in	$L_{i5} = 0$
Bolt Shear Capacity $\phi R_n$ =	40	k	
# of Bolts, $N_b$ =	3	(Spreadsheet design limitation, max. 10 bolts)	
Spacing of Bolt Group, $S$ =	3	in	
C.G. of Bolt Group =	3	in	
$F_{nv}/0.9$ =	75.56	ksi (Table J3.2, A490-N Bolts)	
Short Slotted Hole, $L_h$ =	1.31	in	

$A_b$ =	0.79	in <sup>2</sup> (Bolt Area)
$C'$ =	5.89	AISC Eq. 7-17
$M_{max}$ =	349.46	k*in ( $F_{nv}/0.9 * A_b * C'$ , Eq. 10-7)
<b>Max. Beam Tab Thickness, <math>t_{max}</math> =</b>	<b>0.58</b>	<b>in (<math>6 * M_{max} / (F_y * d^2)</math>) AISC Eq. 10-6</b>
Gross Plate Area, $A_g$ =	5	in <sup>2</sup>
Effective Plate Area, $A_e$ =	3.31	in <sup>2</sup>
$Z$ =	12.5	in <sup>3</sup> ( $1/4 * t * d^2$ )
$S_{net}$ =	8.33	in <sup>3</sup> ( $1/6 * t * d^2$ )


Stress Ratio Results:	
Bolt Shear (V&M):	0.99
Bolt Bearing & Tearout:	0.96
Shear Tab Rupture:	0.79
Shear Tab Block Shear:	0.81
Shear Tab Flexural Rupture:	0.50
Shear Tab Yielding & Flexural:	0.58
4 /16" Tab Weld:	0.56

### Bolt Shear - Elastic Vector Method: (AISC p. 7-7, 7-8)

Bolt Group $I_p$ =	18.00	in <sup>4</sup> /in <sup>2</sup>
$r_{py}$ =	20.67	k ( $V_u / \# \text{ Bolts}$ )
$r_{mx}$ =	33.58	k ( $M_u * L_{i1} / I_p$ )
$H_m$ =	33.58	k ( $r_{mx} * N_c$ ) $N_c = 1$ column of bolts
$R_u$ =	39.43	k ( $r_{py}^2 + r_{mx}^2$ ) <sup>1/2</sup>
$R_u / \phi R_n$ =	<b>0.99</b>	<b>&lt; 1.0 OK</b>

### Bolt Bearing & Tearout: (AISC J3.11)

Bearing $R_{nb}$ =	69.60	k/bolt ( $2.4 * D_b * t * F_u$ ) AISC J3-6a
$L_{ch}$ =	1.34	in ( $d_e - L_h / 2$ )
Horizontal Tearout $R_{nt}$ =	46.76	k/bolt ( $1.2 * L_{ch} * t * F_u$ ) AISC J3-6c
$R_u$ =	39.43	k (worst case bolt shear)
$r_{mx}$ =	33.58	k (worst case horiz. bolt shear)
$\phi$ =	0.75	(AISC J3.11)
Bearing $R_u / \phi R_{nb}$ =	<b>0.76</b>	<b>&lt; 1.0 OK</b>
Tearout $r_{mx} / \phi R_{nt}$ =	<b>0.96</b>	<b>&lt; 1.0 OK</b>

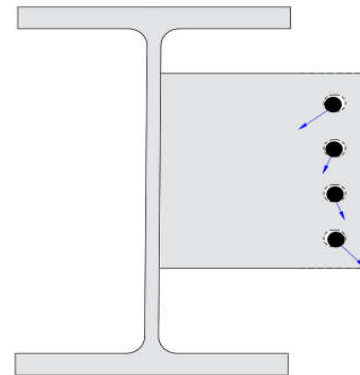

NOTE: FOR VISUAL FORCE SCHEMATIC ONLY



# NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS Beam Tab U.F. #1, U.F. #1A	DATE:	3/18/2025

### Shear Tab Rupture: (AISC J4.2)

Crushed Hole Width,  $W' = 1.1875$  in (plate hole + 1/16" Crushed width)  
 Net Plastic Modulus,  $Z_{net} = 8.76$  in<sup>3</sup> (Summation of  $A \cdot d$  of net plate section)  
 $\phi V_n = 86.46$  k ( $\phi = 0.75, \phi \cdot 60 \cdot F_u \cdot A_e$ ) AISC J4-4  
 $\phi M_n = 381.11$  k-in ( $\phi = 0.75, \phi \cdot F_u \cdot Z$ )  
 $R_u / \phi R_n = 0.79 < 1.0$  OK ( $V_u / \phi V_n$ )<sup>2</sup> + ( $M_u / \phi M_n$ )<sup>2</sup>

### Shear Tab Block Shear: (AISC J4.3)

Vertical Direction

Gross Area in Shear,  $A_{gv} = 4.00$  in<sup>2</sup> ( $t \cdot (d_e + (N_b - 1) \cdot S)$ )  
 Net Area in Shear,  $A_{nv} = 2.22$  in<sup>2</sup>  $A_{gv} - (N_b \cdot W')$  \*  $t$   
 Net Area in Tension,  $A_{nt} = 0.67$  in<sup>2</sup> ( $t \cdot (d_e - L_h / 2)$ )  
 Gross Area,  $\phi R_n = 94.03$  k ( $0.75 \cdot (0.6 \cdot F_y \cdot A_{gv} + U_{bs} \cdot F_u \cdot A_{nt})$ )  $U_{bs} = 1.0$  for single bolt line  
 Net Area,  $\phi R_n = 87.14$  k ( $0.75 \cdot (0.6 \cdot F_u \cdot A_{nv} + U_{bs} \cdot F_u \cdot A_{nt})$ ) AISC J4-5

Horizontal Direction

Gross Area in Shear,  $A_{gv} = 2.00$  in<sup>2</sup> ( $2 \cdot t \cdot d_e$ )  
 Net Area in Shear,  $A_{nv} = 1.34$  in<sup>2</sup> ( $2 \cdot t \cdot (d_e - L_h / 2)$ )  
 Net Area in Tension,  $A_{nt} = 1.81$  in<sup>2</sup> ( $t \cdot ((N_b - 1) \cdot S - (N_b - 1) \cdot W)$ )  
 Gross Area,  $\phi R_n = 111.24$  k ( $0.75 \cdot (0.6 \cdot F_y \cdot A_{gv} + U_{bs} \cdot F_u \cdot A_{nt})$ )  $U_{bs} = 1.0$  for single bolt line  
 Net Area,  $\phi R_n = 113.92$  k ( $0.75 \cdot (0.6 \cdot F_u \cdot A_{nv} + U_{bs} \cdot F_u \cdot A_{nt})$ ) AISC J4-5

$\phi R_n = 87.14$  k Controls  
 $R_u / \phi R_n = 0.81 < 1.0$  OK ( $V_u^2 + H_m^2$ )<sup>1/2</sup> /  $\phi R_n$

### Shear Tab Flexural Rupture: (AISC F11)


Yielding  $M_c = 405.0$  k-in ( $\phi = 0.9, \phi \cdot (F_y \cdot Z < 1.5 F_y \cdot S)$ ) AISC F11-1  
 Lateral-Torsional Buckling Check: 130.0  $L_b \cdot d / t^2$ ,  $L_b = e$  Check for Lateral Torsional Buckling per AISC F11-3  
 Lateral-Torsional Buckling,  $M_c = 405.0$  k-in AISC F11-3  
 $R_u / \phi R_n = 0.50 < 1.0$  OK ( $M_u / M_c$ )

### Shear Tab Yielding & Flexural Strength: (AISC 10-8)

$V_c = 108.0$  k ( $\phi = 1.0, \phi \cdot 0.6 \cdot F_y \cdot A_g$ ) AISC J4-3  
 Yielding  $M_c = 405.0$  k-in ( $\phi = 0.9, \phi \cdot (F_y \cdot Z < 1.5 F_y \cdot S)$ ) AISC F11-1  
 Lateral-Torsional Buckling Check: 130.0  $L_b \cdot d / t^2$ ,  $L_b = e$  Check for Lateral Torsional Buckling per AISC F11-3  
 Lateral-Torsional Buckling,  $M_c = 405.0$  k-in AISC F11-3  
 $R_u / \phi R_n = 0.58 < 1.0$  OK ( $V_u / V_c$ )<sup>2</sup> + ( $M_u / M_c$ )<sup>2</sup> AISC 10-8

### Shear Tab Weld:

Min. Weld Thickness  $t_{wmin} = 0.22$  in.  $t_{wmin} = (t \cdot F_y \cdot 3^{1/2}) / (2 \cdot F_{EXX})$ ,  $F_{EXX} = 70$ ksi Electrode, AISC Engineering Journal, Vol. 46, 2009  
 Weld Provided  $t_w = 0.25$  in  
 Min. Plate Thickness = 0.43 in (AISC Eq. 9-7,  $6.19 \cdot D / F_u$ ) **GOOD**  
 $\phi R_w = 111.35$  k ( $\phi \cdot 0.6 \cdot F_{EXX} \cdot 0.707 \cdot t_w \cdot d \cdot 2$ )  
 $R_u / \phi R_n = 0.56 < 1.0$  OK



NOTE: SCHEMATIC ONLY.  
 HOLES MAY VARY

