


UNDER-FLANGE (UF) CONNECTION

NEW MILL-TYPE U.F. CONNECTION #1A

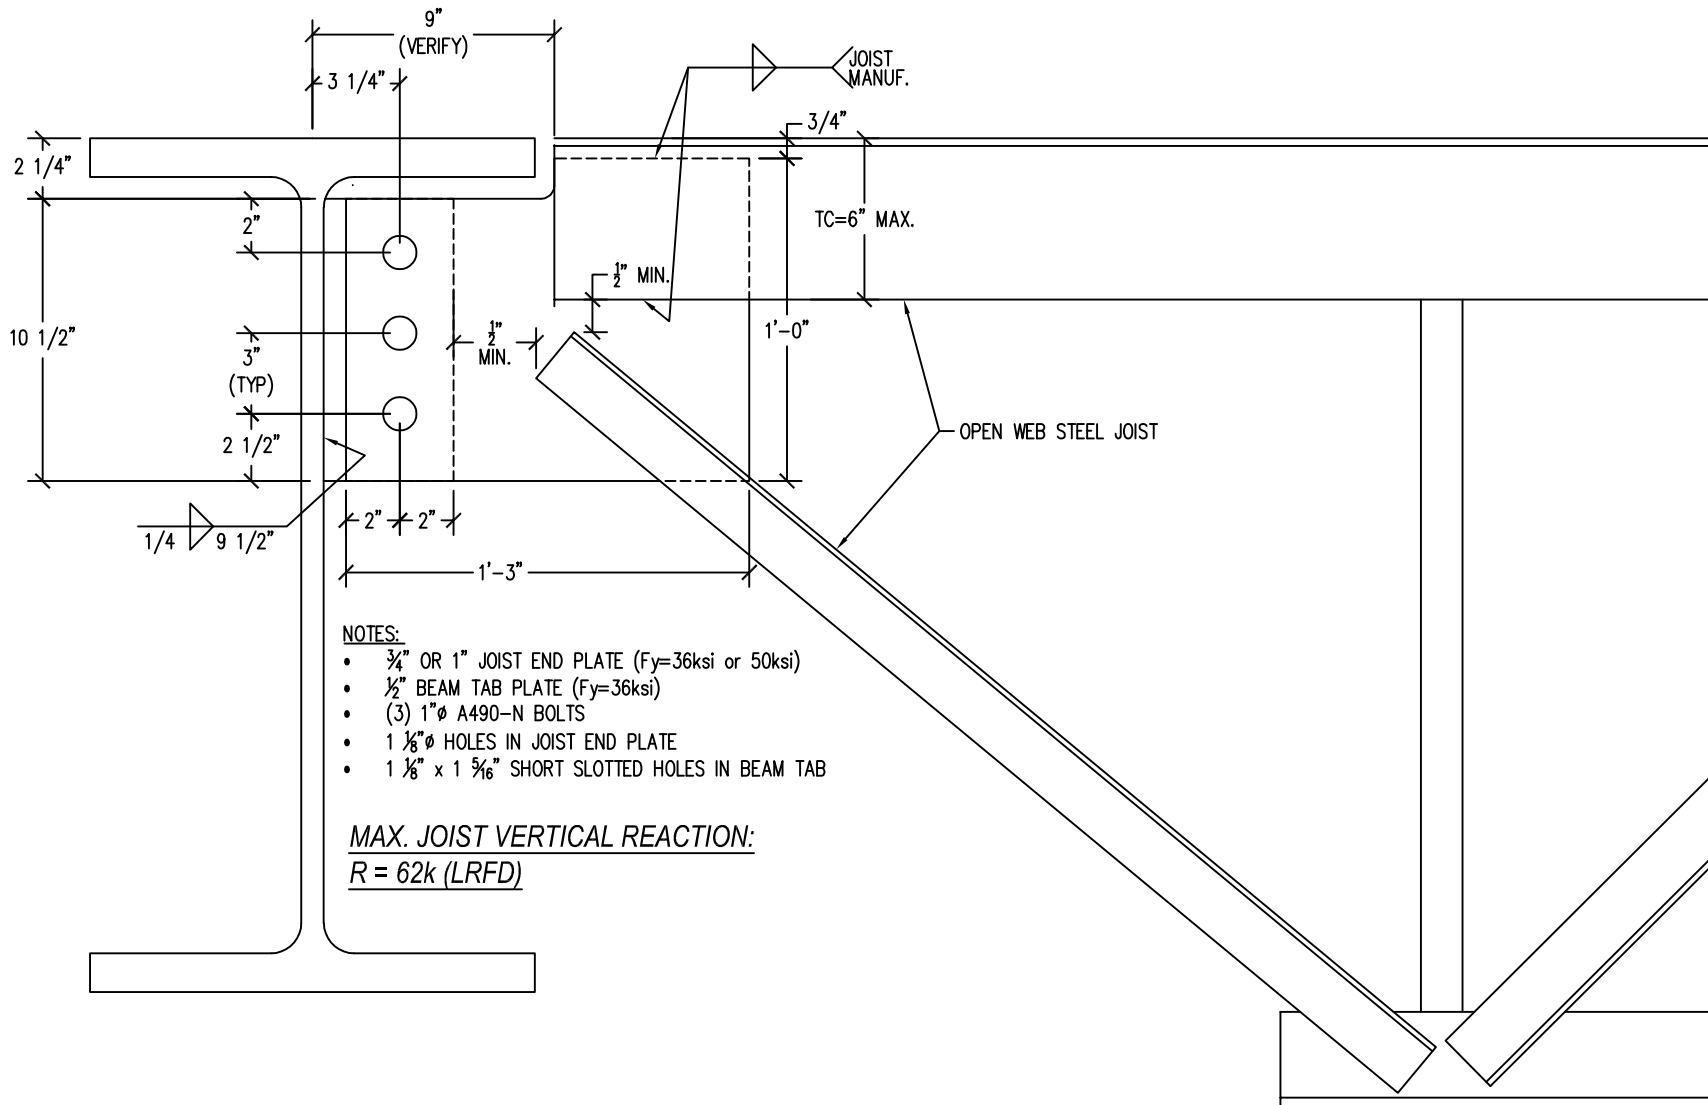

NOTES:

- 3/4" OR 1" JOIST END PLATE (F_y=36ksi or 50ksi)
- 1/2" BEAM TAB PLATE (F_y=36ksi)
- (3) 1" ϕ A490-N BOLTS
- 1 1/8" ϕ HOLES IN JOIST END PLATE
- 1 1/8" x 1 5/16" SHORT SLOTTED HOLES IN BEAM TAB

MAX. JOIST VERTICAL REACTION:

R = 62k (LRFD)



NEW MILLENNIUM

A Steel Dynamics Company

WWW.NEWMILL.COM

Date: 9/26/2023

TYPE U.F. CONNECTION #1A

AISC 14TH - p. 10-104

Holes must satisfy AISC J3.2

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate

Joist Plate, F_u =	58	ksi	TC Hold Back Distance (H) =	9	in
Joist Tab Plate, F_y =	36	ksi	TC Angle Size =	3.5	in
Joist Plate Width, w =	15	in	Joist Plate Hold-Down from TC =	0.75	in
Joist Plate Thickness, t =	0.75	in			
Joist Plate Edge Distances, d_e =	2	in			
	3.25	in			
Vertical Shear, V_u =	62	k (LRFD)	L_{11} =	3	
Vertical Ecc. Moment, M_u =	201.5	k*in (LRFD)	L_{12} =	0	
Joist Top Chord Axial Force, V_{TC} =	93	k (LRFD)...	L_{13} =	0	
		Assumes 1.5:1 End Web Slope	L_{14} =	0	
Bolt Diam. =	1	in	L_{15} =	0	
Bolt Shear Capacity ϕR_n =	40	k (A490-N)			
# of Bolts, N_b =	3	(Spreadsheet design limitation, max. 10 bolts)			
Spacing of Bolt Group, S =	3	in			
Vert. C.G. of Bolt Group =	3	in			
$F_y/0.9$ =	75.56	ksi (Table J3.2, A490-N Bolts)			
Short Slotted Hole, L_h =	1.31	in			

Gross Plate Area, A_g =	11.25	in ²
Effective Plate Area, A_e =	10.41	in ²
Z =	42.1875	in ³ (1/4t*w ²)
S =	28.125	in ³ (1/6t*w ²)

Bolt Shear - Elastic Vector Method: (AISC p. 7-8, 7-9)

Bolt Group l_p =	18.00	in ⁴ /in ²
r_{py} =	20.67	k (Vu/# Bolts)
r_{mx} =	33.58	k ($M_u * L_{11} / l_p$)
H_m =	33.58	k ($r_{mx} * N_c$) $N_c = 1$ column of bolts
R_u =	39.43	k ($r_{py}^2 + r_{mx}^2$) ^{1/2}
$R_u / \phi R_n$ =	0.99	<1.0 OK

Shear Plate Yielding:

ϕV_n =	243	k ($\phi = 1.0, \phi * 0.6 * F_y * A_g$)
Horiz. Axial Shear $V_{TC} / \phi V_n$ =	0.38	<1.0 OK
ϕM_n =	911.25	k*in ($\phi = 0.9, \phi * F_y * S$)
$M_u / \phi M_n$ =	0.22	<1.0 OK
$R_u / \phi R_n$ =	0.20	<1.0 OK ($V_u / \phi V_n$) ² + ($M_u / \phi M_n$) ²

Shear Plate Rupture: (AISC p.9-6)

Crushed Hole Width, W' =	1.1875	in (plate hole + 1/16" Crushed width)
Net Plastic Modulus, Z_{net} =	36.04	in ³ ($Z - W' * t * d_{hole}$) $d_{hole} = 6.90625$ in
ϕV_n =	271.60	k ($\phi = 0.75, \phi * .60 * F_u * A_e$)
ϕM_n =	1567.59	k*in ($\phi = 0.75, \phi * F_u * Z$)
$R_u / \phi R_n$ =	0.07	<1.0 OK ($V_u / \phi V_n$) ² + ($M_u / \phi M_n$) ²

Shear Plate Block Shear: (AISC J4.3)

Vertical Direction		
Gross Area in Shear, A_{gv} =	6.00	in ² ($t * (d_e + (N_b - 1) * S)$)
Net Area in Shear, A_{nv} =	3.33	in ² $A_{gv} - (N_b * W) * t$
Net Area in Tension, A_{nt} =	1.01	in ² ($t * (d_e - (N_c - 0.5) * L_h)$, $N_c = 1$ column of bolts)
Gross Area, ϕR_n =	155.65	k
Net Area, ϕR_n =	145.32	k

Note: Use of L_h for determination of Net Plate Area, allows for the slots to be in the joist end plate, rather than the beam tab.

Horizontal Direction

Gross Area in Shear, A_{gv} =	3.00	in ² ($2 * t * d_e$)
Net Area in Shear, A_{nv} =	2.02	in ² ($2 * t * (d_e - (N_c - 0.5) * L_h)$, $N_c = 1$ column of bolts)
Net Area in Tension, A_{nt} =	2.72	in ² ($t * ((N_b - 1) * S - (N_b - 1) * W)$)
Gross Area, ϕR_n =	206.29	k
Net Area, ϕR_n =	210.30	k

Note: Use of L_h for determination of Net Plate Area, allows for the slots to be in the joist end plate, rather than the beam tab.

ϕR_n =	145.32	k Controls
$R_u / \phi R_n$ =	0.49	<1.0 OK ($V_u^2 + H_m^2$) ^{1/2} / ϕR_n

Shear Plate Local Buckling: (AISC p.10-103, p.9-6)

Shear Stress, f_v =	8.27	ksi (V_{TC} / A_g)
Critical Stress, F_{cr} =	22.89	ksi ($(\phi * F_y)^2 - 3 * f_v^2$) ^{1/2} $\phi = 0.75$, von Mises Yield

λ =	0.25	AISC Eq. 9-18
Q =	1	AISC Eq. 9-15 through 9-17
F_{cr} =	36	ksi ($Q * F_y$) Classic Plate Buckling

von Mises ϕM_n =	579.42	k*in ($\phi * F_{cr} * S$) $\phi = 0.9$
Classic Plate Buckling ϕM_n =	911.25	k*in ($\phi * F_{cr} * S$) $\phi = 0.9$
Governing ϕM_n =	579.42	k*in

$M_u / \phi M_n$ =	0.35	<1.0 OK
--------------------	------	---------


Joist Plate Weld (Angle = 0 deg. & $C_1 = 1.00$ E70 Electrode):

Length of Plate Weld L_w =	7	in ($w - (H - 1.25) - 0.25$)
a_y =	0.2	AISC Table 8-4 $a_y = (\text{Weld Centroid} - \text{TC Centroid}) / L_w$
k_y =	0.4	AISC Table 8-4 $k_y = \text{Weld Spacing} / L_w$
C_y =	3.47	(y-axis weld eccentricity, AISC Table 8-4)
D_{min} =	3	/16ths of an inch Fillet Weld Size (min)

Stress Ratio Results:	
Bolt Shear (V&M):	0.99
Shear Plate Yielding:	0.20
Shear Plate Rupture:	0.07
Shear Plate Block Shear:	0.49
Shear Plate Local Buckling:	0.35

Min. Joist TC to Plate Weld:

3 /16th x 7 " Fillet Weld

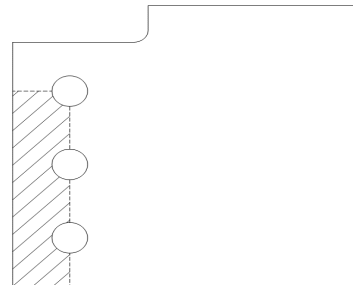

AISC 14TH - p. 10-104

Holes must satisfy AISC J3.2

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate
cp

Beam Tab Plate, $F_u =$	58	ksi	
Beam Tab Plate, $F_y =$	36	ksi	
Beam Tab Plate Depth, $d =$	10	in	
Beam Tab Thickness, $t =$	0.5	in	
Beam Tab Edge Distances, $d_e =$	2	in	$L_{11} = 3$
$e =$	3.25	in	$L_{12} = 0$
Vertical Shear, $V_u =$	62	k (LRFD)	$L_{13} = 0$
Vertical Ecc. Moment, $M_u =$	201.5	k*in (LRFD)	$L_{14} = 0$
Bolt Diam. =	1	in	$L_{15} = 0$
Bolt Shear Capacity $\phi R_n =$	40	k	
# of Bolts, $N_b =$	3	(Spreadsheet design limitation, max. 10 bolts)	
Spacing of Bolt Group, $S =$	3	in	
C.G. of Bolt Group =	3	in	
$F_v/0.9 =$	75.56	ksi (Table J3.2, A490-N Bolts)	
Short Slotted Hole, $L_h =$	1.31	in	
$A_b =$	0.79	in ² (Bolt Area)	
$C' =$	5.89	AISC Eq. 7-21, p. 7-19	
$M_{max} =$	349.46	k*in ($F_v/0.9 * A_b * C'$, Eq. 10-4)	
Max. Beam Tab Thickness, $t_{max} =$	0.58	in ($6 * M_{max} / (F_y * d^2)$ AISC Eq. 10-3)	
Gross Plate Area, $A_g =$	5	in ²	
Effective Plate Area, $A_e =$	3.31	in ²	
$Z =$	12.5	in ³ ($1/4 * d^3$)	
$S_{net} =$	8.33	in ³ ($1/6 * t * d^3$)	

Stress Ratio Results:	
Bolt Shear (V&M):	0.99
Shear Tab Yielding:	0.58
Shear Tab Rupture:	0.79
Shear Tab Block Shear:	0.73
Shear Tab Local Buckling:	0.75
4 / 16" Tab Weld:	0.56

Bolt Shear - Elastic Vector Method: (AISC p. 7-8, 7-9)

Bolt Group $I_p =$	18.00	in ⁴ /in ²
$r_{py} =$	20.67	k (Vu/# Bolts)
$r_{mx} =$	33.58	k ($M_u * L_{11} / I_p$)
$H_m =$	33.58	k ($r_{mx} * N_c$) $N_c = 1$ column of bolts
$R_u =$	39.43	k ($r_{py}^2 + r_{mx}^2$) ^{1/2}
$R_u / \phi R_n =$	0.99	< 1.0 OK

Shear Tab Yielding:

$\phi V_n =$	108	k ($\phi = 1.0, \phi * 0.6 * F_y * A_g$)
$\phi M_n =$	405	k*in ($\phi = 0.9, \phi * F_y * Z$)
$R_u / \phi R_n =$	0.58	< 1.0 OK ($(V_u / \phi V_n)^2 + (M_u / \phi M_n)^2$)

Shear Tab Rupture: (AISC p.9-6)

Crushed Hole Width, $W' =$	1.1875	in (plate hole + 1/16" Crushed width)
Net Plastic Modulus, $Z_{net} =$	8.76	in ³ (Summation of $A * d$ of net plate section)
$\phi V_n =$	86.46	k ($\phi = 0.75, \phi * .60 * F_u * A_e$)
$\phi M_n =$	381.11	k*in ($\phi = 0.75, \phi * F_u * Z$)
$R_u / \phi R_n =$	0.79	< 1.0 OK ($(V_u / \phi V_n)^2 + (M_u / \phi M_n)^2$)

Shear Tab Block Shear: (AISC J4.3)

Vertical Direction		
Gross Area in Shear, $A_{gv} =$	4.00	in ² ($t * (d_e + (N_b - 1) * S)$)
Net Area in Shear, $A_{nv} =$	2.22	in ² ($A_{gv} - (N_b * W) * t$)
Net Area in Tension, $A_{nt} =$	0.67	in ² ($t * (d_e - (N_c - 0.5) * L_h)$, $N_c = 1$ column of bolts)
Gross Area, $\phi R_n =$	103.77	k
Net Area, $\phi R_n =$	96.88	k
Horizontal Direction		
Gross Area in Shear, $A_{gv} =$	2.00	in ² ($2 * t * d_e$)
Net Area in Shear, $A_{nv} =$	1.34	in ² ($2 * t * (d_e - (N_c - 0.5) * L_h)$, $N_c = 1$ column of bolts)
Net Area in Tension, $A_{nt} =$	1.81	in ² ($t * ((N_b - 1) * S - (N_b - 1) * W)$)
Gross Area, $\phi R_n =$	137.53	k
Net Area, $\phi R_n =$	140.20	k

$\phi R_n =$	96.88 k	Controls
$R_u / \phi R_n =$	0.73	< 1.0 OK ($(V_u^2 + H_m^2)^{1/2} / \phi R_n$)

Shear Tab Local Buckling: (AISC p.10-103, p.9-6)

Shear Stress, $f_v =$	12.40	ksi (V_u / A_g)
Critical Stress, $F_{cr} =$	28.89	ksi ($F_y^2 - 3 * f_v^2$) ^{1/2} von Mises Yield AISC p. 10-103
$\lambda =$	0.21	AISC Eq. 9-18
$Q =$	1	AISC Eq. 9-15 through 9-17
$F_{cr} =$	36	ksi ($Q * F_y$) Classic Plate Buckling

von Mises $\phi M_n =$	325.03	k*in ($\phi * F_{cr} * Z$) $\phi = 0.9$
Classic Plate Buckling $\phi M_n =$	270.00	k*in ($\phi * F_{cr} * Z$) $\phi = 0.9$
Governing $\phi M_n =$	270.00	k*in

$M_u / \phi M_n =$	0.75	< 1.0 OK
--------------------	-------------	--------------------

Shear Tab Weld: (AISC p.10-102, p.9-6)

Min. Weld Thickness $t_{wmin} =$	0.22	in. $t_{wmin} = (t * F_y * 3^{1/2}) / (2 * F_{EXX})$, $F_{EXX} = 70$ ksi Electrode, AISC Engineering Journal, Vol. 46, 2009
Weld Provided $t_w =$	0.25	in
Min. Plate Thickness =	0.43	in (AISC Eq. 9-3, $6.19 * D / F_u$)
$\phi R_w =$	111.35	k ($\phi * 0.6 * F_{EXX} * 0.707 * t_w * d * 2$)

$R_u / \phi R_n =$	0.56	< 1.0 OK
--------------------	-------------	--------------------

