


UNDER-FLANGE (UF) CONNECTION

NEW MILL-TYPE U.F. CONNECTION #3

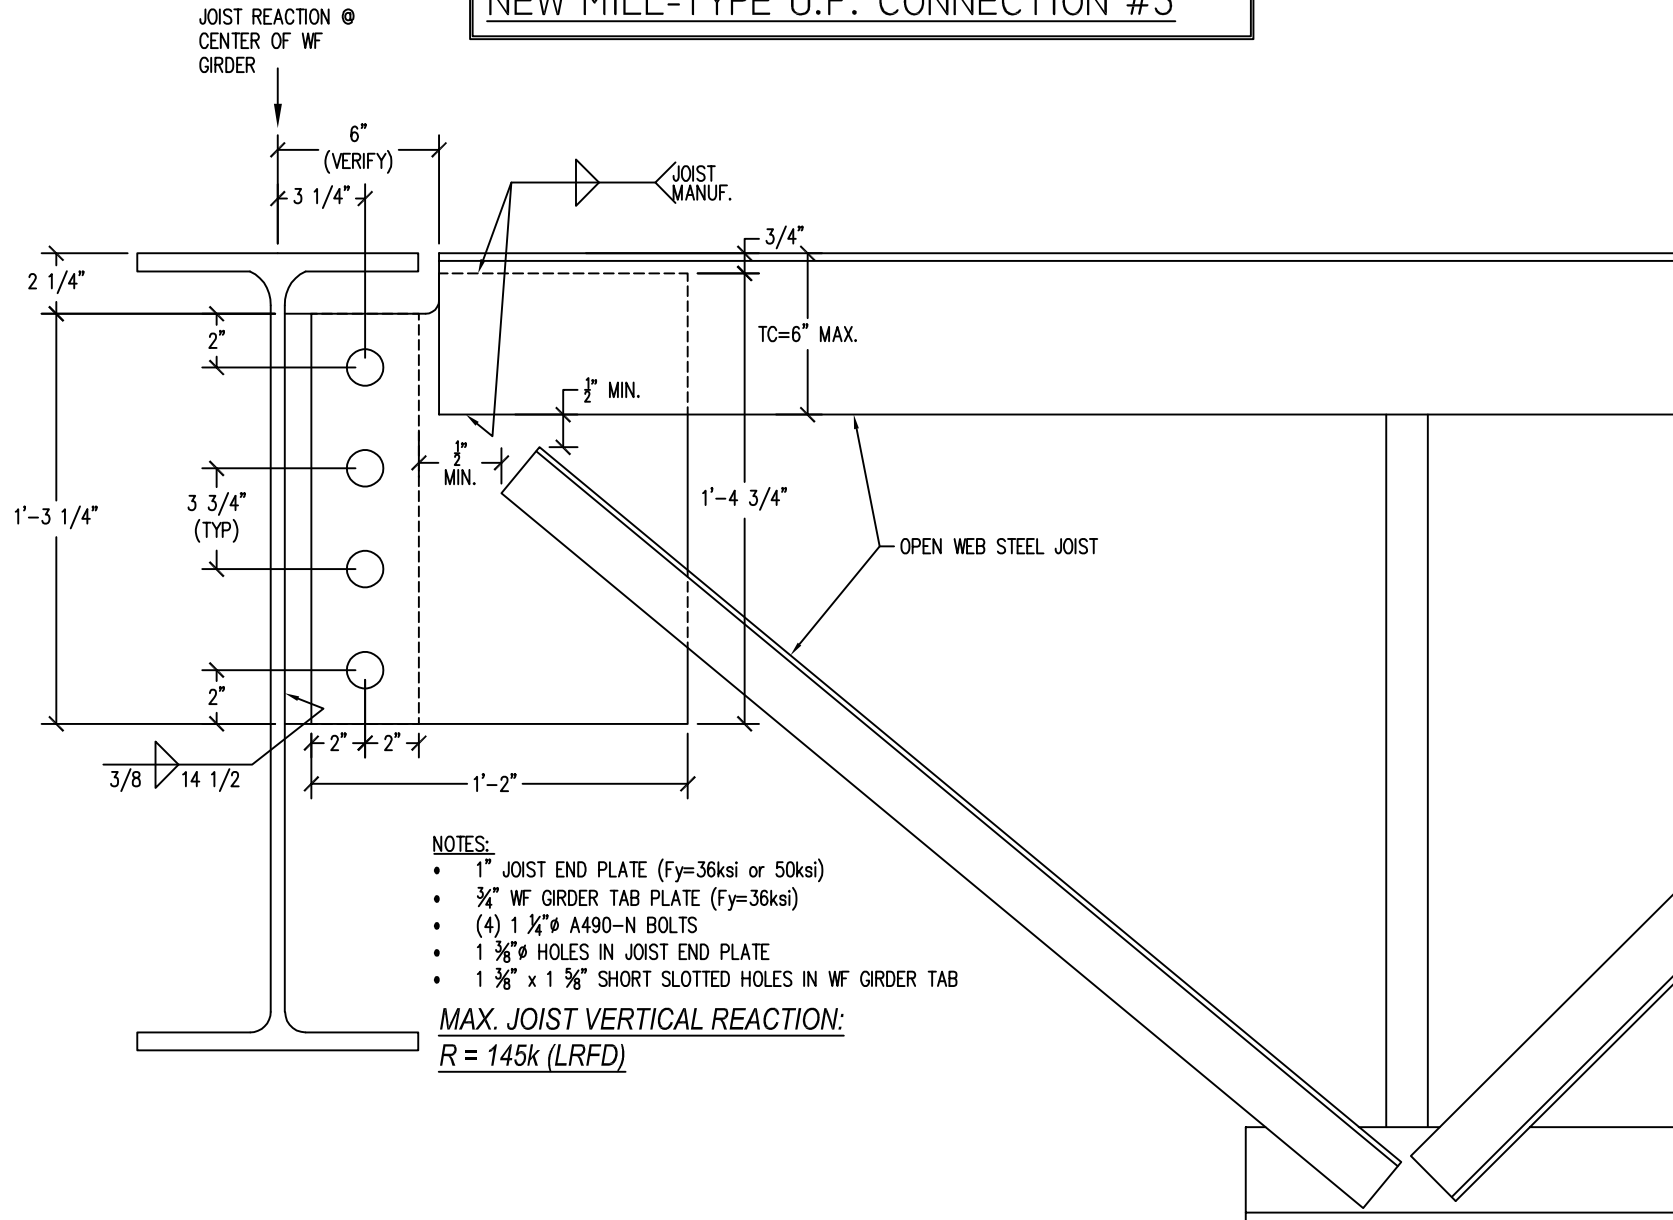

NEW MILLENNIUM

A Steel Dynamics Company

WWW.NEWMILL.COM

Date: 3/18/2025



NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS U.F. #3 Joist End Plate	DATE:	3/18/2025

AISC 16TH - p. 10-49 (Extended Configuration)

Holes must satisfy AISC J3.3

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate

Joist Plate, F_u =	58	ksi	TC Hold Back Distance (H) =	6	in	Joist Plate w =	14	in
Joist Tab Plate, F_y =	36	ksi	TC Angle Size =	3.5	in	Joist Plate d =	15.25	in
Joist Plate, d or w =	14	in	Joist Plate Hold-Down from TC =	0.75	in			
Joist Plate Thickness, t =	1	in						
Joist Plate Edge Distances, d_e =	2	in						
e =	3.25	in						
Vertical Shear, V_u =	145	k (LRFD)				L_{11} =	5.625	
Vertical Ecc. Moment, M_u =	471.25	k*in (LRFD)				L_{12} =	1.875	
Bolt Diameter, D_b =	1.25	in				L_{13} =	0	
Bolt Shear Capacity ϕR_n =	62.7	k (A490-N)				L_{14} =	0	
# of Bolts, N_b =	4	(Spreadsheet design limitation, max. 10 bolts)				L_{15} =	0	
Spacing of Bolt Group, S =	3.75	in						
Vert. C.G. of Bolt Group =	5.625	in						
$F_{nv}/0.9$ =	75.56	ksi (Table J3.2, A490-N Bolts)						
Short Slotted Hole, L_h =	1.63	in (conservative design, allows for slotted holes in joist plate)						
Joist Top Chord Axial Force, V_{TC} =	217.5	k (LRFD)...Assumes 1.5:1 End Web Slope						

Gross Plate Area, A_g =	14	in ²
Effective Plate Area, A_e =	12.63	in ²
Z =	49	in ³ (1/4t*w^2)
S =	32.6667	in ³ (1/6t*w^2)

Bolt Shear - Elastic Vector Method: (AISC p. 7-7, 7-8)

Bolt Group I_p =	70.31	in ⁴ /in ²
r_{py} =	36.25	k (Vu/# Bolts)
r_{mx} =	37.70	k ($M_u * L_{11} / I_p$)
H_m =	37.70	k ($r_{mx} * N_c$) N_c = 1 column of bolts
R_u =	52.30	k ($r_{py}^2 + r_{mx}^2$) ^{1/2}
$R_u / \phi R_n$ =	0.83	< 1.0 OK


Bolt Bearing & Tearout: (AISC J3.11)

Bearing R_{nb} =	174.00	k/bolt (2.4* D_b * t * F_u) AISC J3-6a
L_{ch} =	1.19	in ($d_e - L_h/2$)
Horizontal Tearout R_{nt} =	82.65	k/bolt (1.2* L_{ch} * t * F_u) AISC J3-6c
R_u =	52.30	k (worst case bolt shear)
r_{mx} =	37.70	k (worst case horiz. bolt shear)
ϕ =	0.75	(AISC J3.11)
Bearing $R_u / \phi R_{nb}$ =	0.40	< 1.0 OK
Tearout $r_{mx} / \phi R_{nt}$ =	0.61	< 1.0 OK

Stress Ratio Results:	
Bolt Shear (V&M):	0.83
Bolt Bearing & Tearout:	0.61
Shear Plate Rupture:	0.27
Shear Plate Block Shear:	0.61
Shear Plate Flexural Rupture:	0.30
Shear Plate Yielding & Flexural:	0.32

Min. Joist TC to Plate Weld:

5 /16th x 9 " Fillet Weld

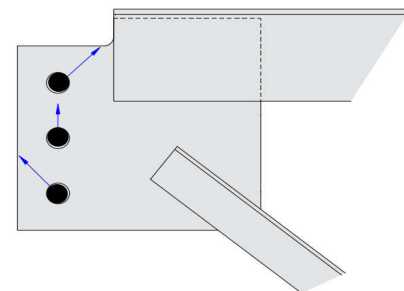

NOTE: FOR VISUAL FORCE SCHEMATIC ONLY



NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS U.F. #3 Joist End Plate	DATE:	3/18/2025

Shear Plate Rupture: (AISC J4.2)

Crushed Hole Width, $W' = 1.4375$ in (plate hole + $1/16"$ Crushed width)
Net Plastic Modulus, $Z_{net} = 39.97$ in³ ($Z - W' * t * d_{hole}$) $d_{hole} = 6.28125$
 $\phi V_n = 329.51$ k ($\phi = 0.75, \phi * .60 * F_u * A_e$) AISC J4-4
 $\phi M_n = 1738.73$ k*in ($\phi = 0.75, \phi * F_u * Z$)
 $R_u / \phi R_n = 0.27 < 1.0$ OK ($V_u / \phi V_n$)² + ($M_u / \phi M_n$)²

Shear Plate Block Shear: (AISC J4.3)

Vertical Direction

Gross Area in Shear, $A_{gv} = 13.25$ in² ($t * (d_e + (N_b - 1) * S)$)
Net Area in Shear, $A_{nv} = 7.50$ in² $A_{gv} - (N_b * W')$ * t
Net Area in Tension, $A_{nt} = 1.19$ in² ($t * (d_e - L_h / 2)$)
Gross Area, $\phi R_n = 266.31$ k ($0.75 * (0.6 * F_y * A_{gv} + U_{bs} * F_u * A_{nt})$) $U_{bs} = 1.0$ for single bolt line
Net Area, $\phi R_n = 247.41$ k ($0.75 * (0.6 * F_u * A_{nv} + U_{bs} * F_u * A_{nt})$) AISC J4-5

Note: Use of L_h for determination of Net Plate Area, allows for the slots to be in either the joist end plate or the beam tab.

Horizontal Direction

Gross Area in Shear, $A_{gv} = 4.00$ in² ($2 * t * d_e$)
Net Area in Shear, $A_{nv} = 2.38$ in² ($2 * t * (d_e - L_h / 2)$)
Net Area in Tension, $A_{nt} = 6.94$ in² ($t * ((N_b - 1) * S - (N_b - 1) * W)$)
Gross Area, $\phi R_n = 366.58$ k ($0.75 * (0.6 * F_y * A_{gv} + U_{bs} * F_u * A_{nt})$) $U_{bs} = 1.0$ for single bolt line
Net Area, $\phi R_n = 363.77$ k ($0.75 * (0.6 * F_u * A_{nv} + U_{bs} * F_u * A_{nt})$) AISC J4-5

Note: Use of L_h for determination of Net Plate Area, allows for the slots to be in either the joist end plate or the beam tab.

$\phi R_n = 247.41$ k Controls
 $R_u / \phi R_n = 0.61 < 1.0$ OK ($V_u^2 + H_m^2$)^{1/2} / ϕR_n

Shear Plate Flexural Rupture: (AISC F11)


Yielding $M_c = 1587.6$ k*in ($\phi = 0.9, \phi * (F_y * Z < 1.5 F_y * S)$) AISC F11-1
Lateral-Torsional Buckling Check: 45.5 $L_b * d / t^2$, $L_b = e$ $< 0.08 * E / F_y$ Lateral Torsional Buckling does not apply
Lateral-Torsional Buckling, $M_c = N/A$ k*in
 $R_u / \phi R_n = 0.30 < 1.0$ OK (M_u / M_c)

Shear Plate Yielding & Flexural Strength: (AISC 10-8)


$V_c = 302.4$ k ($\phi = 1.0, \phi * 0.6 * F_y * A_g$) AISC J4-3
Yielding $M_c = 1587.6$ k*in ($\phi = 0.9, \phi * (F_y * Z < 1.5 F_y * S)$) AISC F11-1
Lateral-Torsional Buckling Check: 45.5 $L_b * d / t^2$, $L_b = e$ $< 0.08 * E / F_y$ Lateral Torsional Buckling does not apply
Lateral-Torsional Buckling, $M_c = N/A$ k*in
 $R_u / \phi R_n = 0.32 < 1.0$ OK (V_u / V_c)² + (M_u / M_c)² AISC 10-8

Joist Plate Weld (Angle = 0 deg. & $C_1 = 1.00$ E70 Electrode):

Length of Plate Weld $L_w = 9$ in ($w - (H - 1.25) - 0.25"$)
 $a_y = 0.2$ AISC Table 8-4 $a_y = (\text{Weld Centroid} - \text{TC Centroid}) / L_w$
 $k_y = 0.4$ AISC Table 8-4 $k_y = \text{Weld Spacing} / L_w$
 $C_y = 3.47$ (y-axis weld eccentricity, AISC Table 8-4)
 $D_{min} = 5$ /16ths of an inch Fillet Weld Size (min)

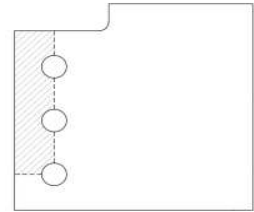

NOTE: SCHEMATIC ONLY.
HOLES OR PLATE MAY VARY

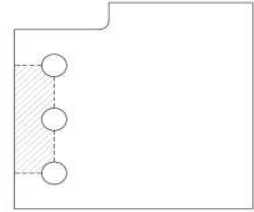



NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS Beam Tab U.F. #3, U.F. #3A	DATE:	3/18/2025

AISC 16TH - p. 10-49 (Extended Configuration)

Holes must satisfy AISC J3.3

Horizontal Axial forces (seismic or wind) if present, to be transferred from beam to joist via tie plate

Beam Tab Plate, F_u =	58	ksi	
Beam Tab Plate, F_y =	36	ksi	
Beam Tab Plate Depth, d =	15.25	in	
Beam Tab Thickness, t =	0.75	in	
Beam Tab Edge Distances, d_e =	2	in	$L_{11} = 5.625$
e =	3.25	in	$L_{12} = 1.875$
Vertical Shear, V_u =	145	k (LRFD)	$L_{13} = 0$
Vertical Ecc. Moment, M_u =	471.25	k*in (LRFD)	$L_{14} = 0$
Bolt Diameter, D_b =	1.25	in	$L_{15} = 0$
Bolt Shear Capacity ϕR_n =	62.7	k	
# of Bolts, N_b =	4	(Spreadsheet design limitation, max. 10 bolts)	
Spacing of Bolt Group, S =	3.75	in	
C.G. of Bolt Group =	5.625	in	
$F_{nv}/0.9$ =	75.56	ksi (Table J3.2, A490-N Bolts)	
Short Slotted Hole, L_h =	1.63	in	

A_b =	1.23	in ² (Bolt Area)
C' =	14.07	AISC Eq. 7-17
M_{max} =	1304.62	k*in ($F_{nv}/0.9 * A_b * C'$, Eq. 10-7)

Max. Beam Tab Thickness, t_{max} = 0.93 in ($6 * M_{max} / (F_y * d^2)$) AISC Eq. 10-6

Gross Plate Area, A_g =	11.4375	in ²
Effective Plate Area, A_e =	7.31	in ²
Z =	43.6055	in ³ ($1/4 * t * d^2$)
S_{net} =	29.07	in ³ ($1/6 * t * d^2$)


Bolt Shear - Elastic Vector Method: (AISC p. 7-7, 7-8)

Bolt Group I_p =	70.31	in ⁴ /in ²
r_{py} =	36.25	k ($V_u / \# \text{ Bolts}$)
r_{mx} =	37.70	k ($M_u * L_{11} / I_p$)
H_m =	37.70	k ($r_{mx} * N_c$) $N_c = 1$ column of bolts
R_u =	52.30	k ($r_{py}^2 + r_{mx}^2$) ^{1/2}
$R_u / \phi R_n$ =	0.83	< 1.0 OK

Bolt Bearing & Tearout: (AISC J3.11)

Bearing R_{nb} =	130.50	k/bolt ($2.4 * D_b * t * F_u$) AISC J3-6a
L_{ch} =	1.19	in ($d_e - L_h / 2$)
Horizontal Tearout R_{nt} =	61.99	k/bolt ($1.2 * L_{ch} * t * F_u$) AISC J3-6c
R_u =	52.30	k (worst case bolt shear)
r_{mx} =	37.70	k (worst case horiz. bolt shear)
ϕ =	0.75	(AISC J3.11)
Bearing $R_u / \phi R_{nb}$ =	0.53	< 1.0 OK
Tearout $r_{mx} / \phi R_{nt}$ =	0.81	< 1.0 OK

Stress Ratio Results:	
Bolt Shear (V&M):	0.83
Bolt Bearing & Tearout:	0.81
Shear Tab Rupture:	0.73
Shear Tab Block Shear:	0.81
Shear Tab Flexural Rupture:	0.33
Shear Tab Yielding & Flexural:	0.46
6 /16" Tab Weld:	0.57

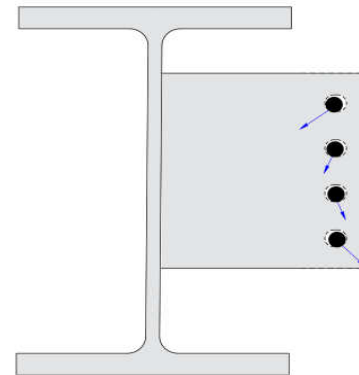

NOTE: FOR VISUAL FORCE SCHEMATIC ONLY



NEW MILLENNIUM

A Steel Dynamics Company

JOB NAME:	JOB #:		
LOCATION:	NMBS Beam Tab U.F. #3, U.F. #3A	DATE:	3/18/2025

Shear Tab Rupture: (AISC J4.2)

Crushed Hole Width, $W' = 1.4375$ in (plate hole + 1/16" Crushed width)
 Net Plastic Modulus, $Z_{net} = 27.43$ in³ (Summation of $A \cdot d$ of net plate section)
 $\phi V_n = 190.86$ k ($\phi = 0.75, \phi \cdot 60 \cdot F_u \cdot A_e$) AISC J4-4
 $\phi M_n = 1193.36$ k-in ($\phi = 0.75, \phi \cdot F_u \cdot Z$)
 $R_u / \phi R_n = 0.73 < 1.0$ OK $(V_u / \phi V_n)^2 + (M_u / \phi M_n)^2$

Shear Tab Block Shear: (AISC J4.3)

Vertical Direction

Gross Area in Shear, $A_{gv} = 9.94$ in² ($t \cdot (d_e + (N_b - 1) \cdot S)$)
 Net Area in Shear, $A_{nv} = 5.63$ in² $A_{gv} - (N_b \cdot W')$ $\cdot t$
 Net Area in Tension, $A_{nt} = 0.89$ in² ($t \cdot (d_e - L_h / 2)$)
 Gross Area, $\phi R_n = 199.73$ k ($0.75 \cdot (0.6 \cdot F_y \cdot A_{gv} + U_{bs} \cdot F_u \cdot A_{nt})$) $U_{bs} = 1.0$ for single bolt line
 Net Area, $\phi R_n = 185.55$ k ($0.75 \cdot (0.6 \cdot F_u \cdot A_{nv} + U_{bs} \cdot F_u \cdot A_{nt})$) AISC J4-5

Horizontal Direction

Gross Area in Shear, $A_{gv} = 3.00$ in² ($2 \cdot t \cdot d_e$)
 Net Area in Shear, $A_{nv} = 1.78$ in² ($2 \cdot t \cdot (d_e - L_h / 2)$)
 Net Area in Tension, $A_{nt} = 5.20$ in² ($t \cdot ((N_b - 1) \cdot S - (N_b - 1) \cdot W)$)
 Gross Area, $\phi R_n = 274.94$ k ($0.75 \cdot (0.6 \cdot F_y \cdot A_{gv} + U_{bs} \cdot F_u \cdot A_{nt})$) $U_{bs} = 1.0$ for single bolt line
 Net Area, $\phi R_n = 272.83$ k ($0.75 \cdot (0.6 \cdot F_u \cdot A_{nv} + U_{bs} \cdot F_u \cdot A_{nt})$) AISC J4-5

$\phi R_n = 185.55$ k Controls
 $R_u / \phi R_n = 0.81 < 1.0$ OK $(V_u^2 + H_m^2)^{1/2} / \phi R_n$

Shear Tab Flexural Rupture: (AISC F11)


Yielding $M_c = 1412.8$ k-in ($\phi = 0.9, \phi \cdot (F_y \cdot Z < 1.5 F_y \cdot S)$) AISC F11-1
 Lateral-Torsional Buckling Check: 88.1 Lb $\cdot d / t^2$, $L_b = e$ Check for Lateral Torsional Buckling per AISC F11-3
 Lateral-Torsional Buckling, $M_c = 1412.8$ k-in AISC F11-3
 $R_u / \phi R_n = 0.33 < 1.0$ OK (M_u / M_c)

Shear Tab Yielding & Flexural Strength: (AISC 10-8)

$V_c = 247.1$ k ($\phi = 1.0, \phi \cdot 0.6 \cdot F_y \cdot A_g$) AISC J4-3
 Yielding $M_c = 1412.8$ k-in ($\phi = 0.9, \phi \cdot (F_y \cdot Z < 1.5 F_y \cdot S)$) AISC F11-1
 Lateral-Torsional Buckling Check: 88.1 Lb $\cdot d / t^2$, $L_b = e$ Check for Lateral Torsional Buckling per AISC F11-3
 Lateral-Torsional Buckling, $M_c = 1412.8$ k-in AISC F11-3
 $R_u / \phi R_n = 0.46 < 1.0$ OK $(V_u / V_c)^2 + (M_u / M_c)^2$ AISC 10-8

Shear Tab Weld:

Min. Weld Thickness $t_{wmin} = 0.33$ in. $t_{wmin} = (t \cdot F_y \cdot 3^{1/2}) / (2 \cdot F_{EXX})$, $F_{EXX} = 70$ ksi Electrode, AISC Engineering Journal, Vol. 46, 2009
 Weld Provided $t_w = 0.375$ in
 Min. Plate Thickness = 0.64 in (AISC Eq. 9-7, $6.19 \cdot D / F_u$) **GOOD**
 $\phi R_w = 254.72$ k ($\phi \cdot 0.6 \cdot F_{EXX} \cdot 0.707 \cdot t_w \cdot d \cdot 2$)
 $R_u / \phi R_n = 0.57 < 1.0$ OK



NOTE: SCHEMATIC ONLY.
 HOLES MAY VARY

